



Standards



Technical Specifications



Classic collar model with self-adhesive zip flap for total tightness



Two-way for easy dressing and undressing



Jersey cuffs



Raglan sleeve allows much greater freedom of movement


- Breathable material for a better comfort
- Self-adhesive flap over zipper
- Two-sided antistatic treatment to allow easy dissipation of electrostatic charges
- Two-way zip closure
- Elasticated ankles and waist for a better fit
- Standardized against biological risks and radioactive particles



Material and Seam

MICROPOROUS FILM MATERIAL

Breathable material impermeable against liquid splashes.

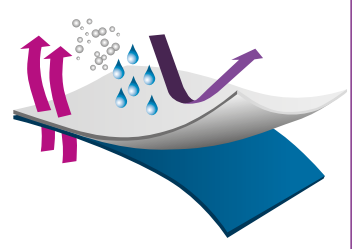

STITCHED SEAM

For a high mechanical resistance. Appropriate for light liquid splashes and dry particles.



4 THREADS

Applications

- Agri-food and chemical industries
- Composite industries
- Industrial cleaning and maintenance
- Factory visits
- Public works
- Splashes of oil and grease

Technical Data

Resistance to liquid penetration

Chemical properties of the material EN ISO 6530	Penetration	Repulsion
H ₂ SO ₄ - Sulphuric acid 30%	Class 3	Class 3
NaOH - Sodium Hydroxide 10%	Class 3	Class 3
O Xylene	Class 2	Class 3
Butan-1-ol	Class 2	Class 3

Seam strength

Test Method EN ISO 13935-2	Results	Class
	120 N	3/6

Reference

M	L	XL	XXL	XXXL
WL-PC-02	WL-PC-03	WL-PC-04	WL-PC-05	WL-PC-06

WL-PC-OX

