



A.camineti

FIREPLACE INSERTS & STOVES

FIRE, A GIFT FROM THE NATURE, IT'S OUR
PLEASURE TO SERVE IT IN THE BEST WAY!



ABOUT US.

For more than 33 years A.Caminetti, formed by a small Italian family business, has developed into a large company that meets all the requirements of customers. A.caminetti adapts to all standards, simplicity in reliability and refinement in design.

Our company has been committed to generating heat conveniently, economically, with environmental responsibility and in accordance with trade requirements. With a wide variety of outstanding product developments which provides heating problem - solutions, A.Caminetti is being placed with the highest quality products world wide!

A.Caminetti's orientation is decisively international - as it exports in Europe,Asia and Africa region.

With a dedicated commitment and with a passionate work for fire, we achieved to be one of the leaders in the International Heating market. A.caminetti is not only a trade mark, but a solution for all the desires and customers fantasy, for a suitable and comfortable accomodation.



High Efficiency > 80%

Eco Friendly Product

Lovely Performance

Premium Design

Easy installation

Low emission

Safety / Easy operation

The Inspiration behind

A.caminetti

The passion and love for the wood fire inspired us to create the unique fireplaces A.caminetti.

A modern fireplace with a magnificent and cozy fire that will fill your spirit with inspiration and will relax your mind.

Our philosophy is different and our vision is positive. Starting from Gladys Taber quote, a house with no fireplace is a house with no heart, we believe that every family deserve a fireplace in their home, we simply do our best for that.

The price, quality and fire performance will make you a satisfied client.

A.caminetti



OUR PRODUCTS.

Insert coat made of steel, with a thickness of 3 mm in accordance with EN 13229

Insert components manufactured using modern cnc machines (2D Laser and press brakes)

Insert welded with MAG, guaranteed high quality.

Steel door made of a special profile, guaranteeing rigidity and high-temperature resistance.

Heat resistant ceramic glass with working temperatures of up to 800°C.

Each material in our fireplaces are strictly chosen, we are proud for our partners,

Partner companies: Senotherm/ Schock metall/ Schott ROBAX/ Culimeta/ Skamol

Culimeta is global leading industry supplier in the field of gaskets for fireplaces, as well as door and window seals for industrial-, stove- and heating boiler constructions.

Skamol is technical insulation systems for a wide range of applications within building and industry. With our systems, we aim at adding significant value to our partners, customers and to the environment. By implementing our unique systems, benefits such as energy savings, enhanced performance, improved working and living environment and even reduced CO2 emissions can be achieved

SCHOTT ROBAX® glass-ceramic is "Engineered in Germany" and manufactured to demanding standards for quality and environmental management

Schock Metall stands for precision in ball bearing slides and special profiles. For more than 40 years, they have been using the high-precision Schock roll forming technology to manufacture telescopic slides and other sliding systems.

The senotherm® CLASSIC product line comprises a comprehensive range of conventional coating solutions. With a guaranteed "true" temperature resistance of up to 600 °C

A WIDE RANGE
OF SHAPES,
ACCORDING
TO YOUR
DESIRES
AND
PREFERENCES!



- ▶ FLAT GLASS
- ▶ CORNER GLASS
- ▶ 3 SIDE GLASS (3D)
- ▶ 4 SIDE GLASS (4D)



OUR COMPANY.

33 YEARS OF EXPERIENCE!

Production facilities located in Albania.

Warehouse in Munich/ Germany for express delivery in EU-COUNTRIES.


Production area 15000 sqm.

Annual production capacity,

8000 - Lift door fireplaces/wood burning.

ADVANTAGES.

- ✓ A.caminetti products **are made of high quality materials** that provide maximal functional efficiency.
- ✓ Our products will not leave indifferent even the most demanding buyer.
- ✓ **High power** will provide heating even in a large room.
- ✓ **Fuel for briquettes and fire wood.**
- ✓ The fireplaces are made of steel, which provides you with **reliable use for decades.**
- ✓ Each model can be orderd under **individual sizes.**
- ✓ **Products are certified** with- CE/ EN 13229/ BIm SchV II/ Flamme VERTE/ ECODESIGN.
- ✓ **Guarantee in 5 years** will allow you to be calm and confident in the reliability of the company.

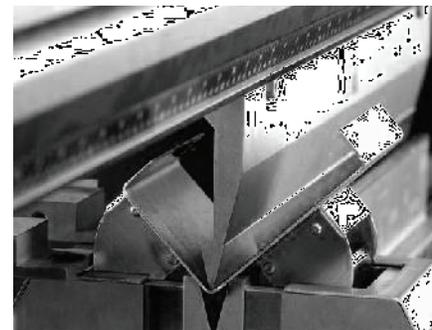

People's fireplace!






INDIVIDUAL SIZES

Acaminetti company completes all the customer requirements, we have a new vision, to realise the fantasy of customer with the Individual sizes.

A.caminetti produce each model with individual sizes.

Turn your fantasy into reality.

Your faith to our company, for us is precious, we appreciate it maximally and do our best to make you a satisfied client.




132.00

1713.00

502.00

502.00

1713.00

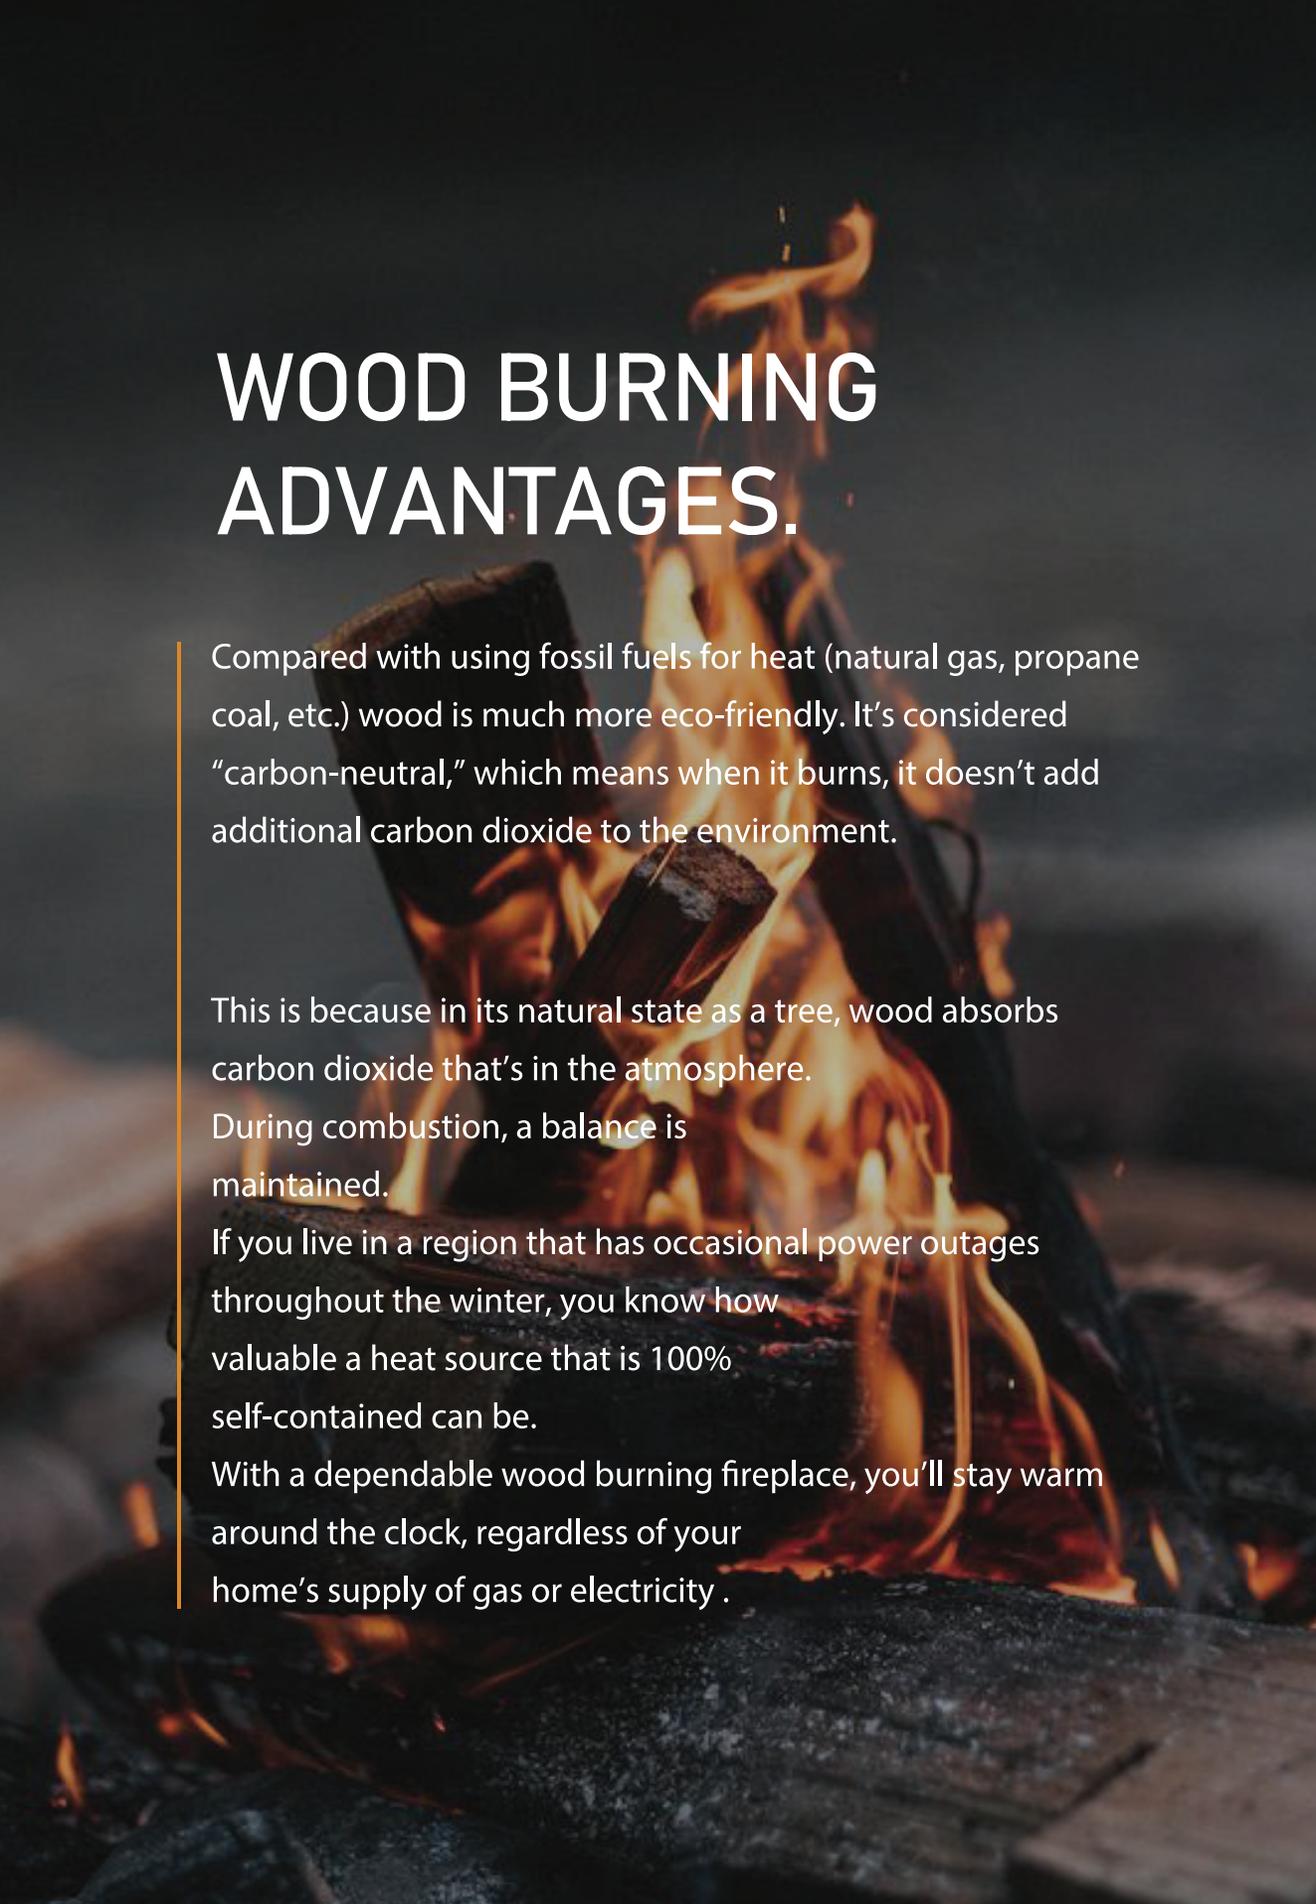

WOOD BURNING ADVANTAGES.

Compared with using fossil fuels for heat (natural gas, propane coal, etc.) wood is much more eco-friendly. It's considered "carbon-neutral," which means when it burns, it doesn't add additional carbon dioxide to the environment.

This is because in its natural state as a tree, wood absorbs carbon dioxide that's in the atmosphere.

During combustion, a balance is maintained.

If you live in a region that has occasional power outages throughout the winter, you know how valuable a heat source that is 100% self-contained can be.

With a dependable wood burning fireplace, you'll stay warm around the clock, regardless of your home's supply of gas or electricity .

PREMIUM EDITION



CRYSTAL 70

PATENTED GLASS CLEANING SYSTEM / EP4050263A1




TECHNICAL SPECIFICATION

MODEL	CRYSTAL 70
POWER	6-12 KW
EFFICIENCY	>80 %
CONSUME	2.2 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	286 KG
FLUE GAS TEMPERATURE	220°C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1442 MM
DEPTH	734 MM
WIDTH	957 MM

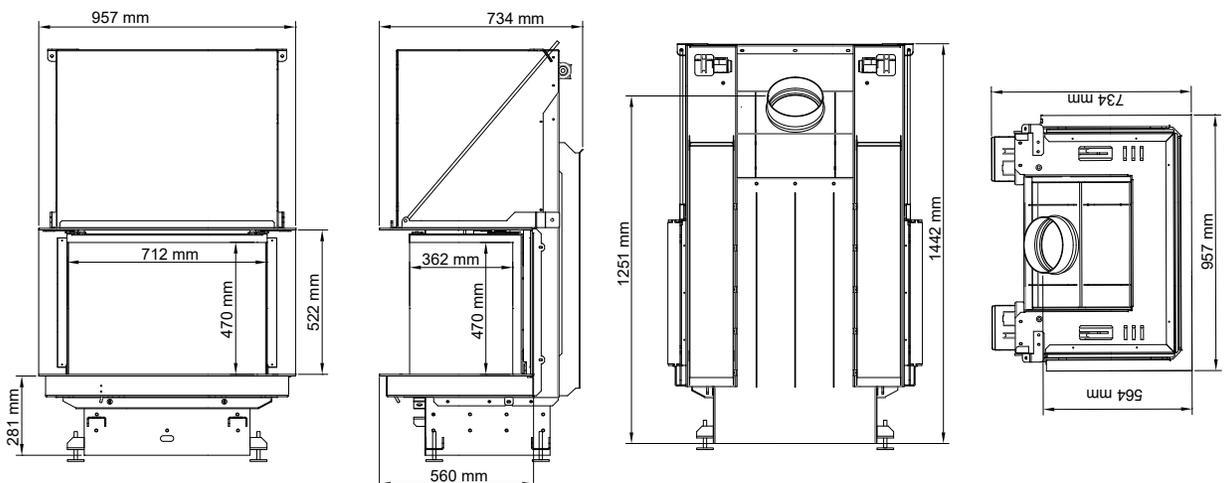

CRYSTAL 90

PATENTED GLASS CLEANING SYSTEM / EP4050263A1







TECHNICAL SPECIFICATION

MODEL	CRYSTAL 90
POWER	6.5 - 12.5 KW
EFFICIENCY	>80 %
CONSUME	4 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	316 KG
FLUE GAS TEMPERATURE	213 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY / SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1442 MM
DEPTH	734 MM
WIDTH	1107 MM

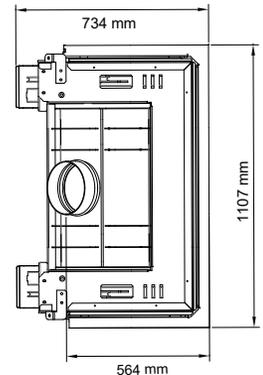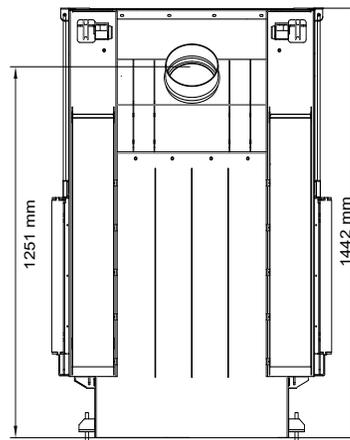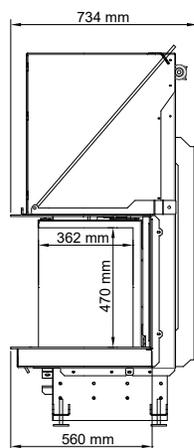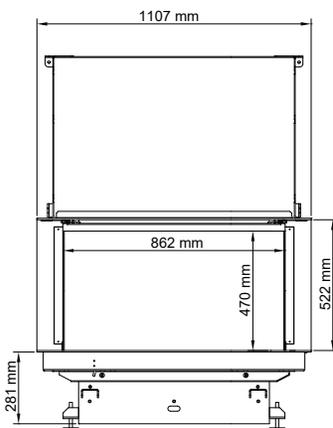

PREMIUM EDITION

CRYSTAL 100

PATENTED GLASS CLEANING SYSTEM / EP4050263A1







TECHNICAL SPECIFICATION

MODEL	CRYSTAL 100
POWER	7 - 13 KW
EFFICIENCY	>80 %
CONSUME	4.5 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	343 KG
FLUE GAS TEMPERATURE	211 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1442 MM
DEPTH	734 MM
WIDTH	1257 MM

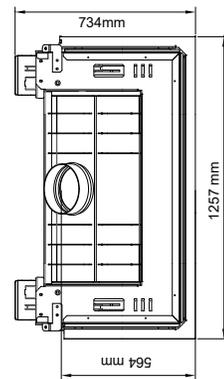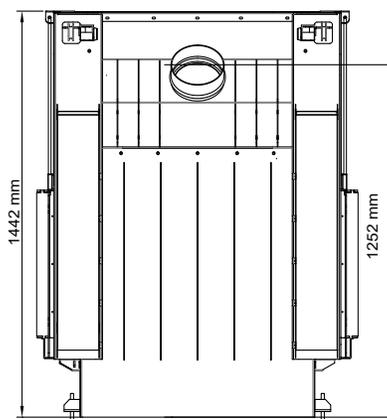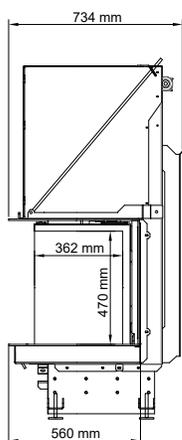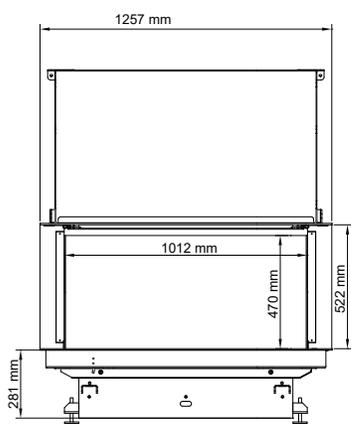

CRYSTAL 3D 50/50

PATENTED GLASS CLEANING SYSTEM / EP4050263A1




TECHNICAL SPECIFICATION

MODEL	CRYSTAL 3D 50/50
POWER	7-13 KW
EFFICIENCY	>80 %
CONSUME	2.7 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	282 KG
FLUE GAS TEMPERATURE	218 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Φ 200 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Φ 150 MM
PRIMARY / SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1442 MM
DEPTH	884 MM
WIDTH	757 MM

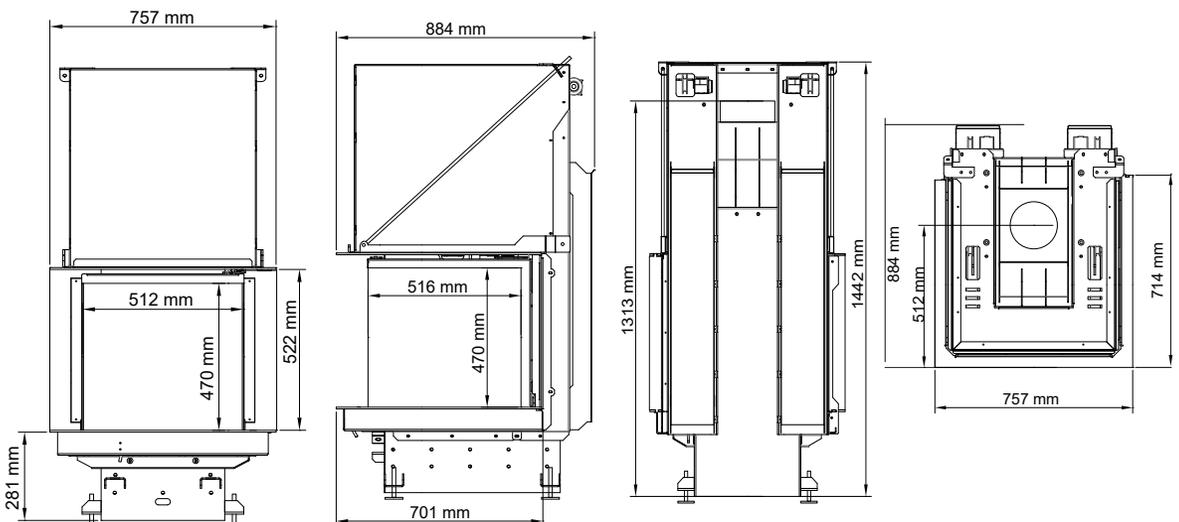

PREMIUM EDITION

CRYSTAL 3D 50/70

PATENTED GLASS CLEANING SYSTEM / EP4050263A1




TECHNICAL SPECIFICATION

MODEL	CRYSTAL 3D 50/70
POWER	8-14 KW
EFFICIENCY	>80 %
CONSUME	2.7 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	327 KG
FLUE GAS TEMPERATURE	218 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1442 MM
DEPTH	1084 MM
WIDTH	757 MM

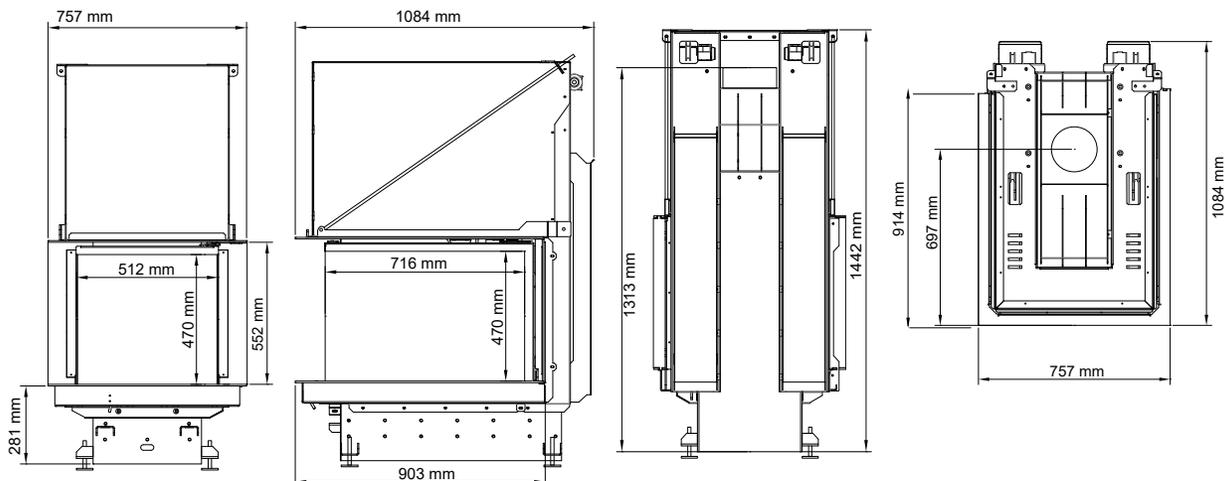

PREMIUM EDITION

QUATTRO 50 L

PATENTED GLASS CLEANING SYSTEM / EP4050263A1




TECHNICAL SPECIFICATION

MODEL	QUATTRO 50 L
POWER	6-12 KW
EFFICIENCY	>80 %
CONSUME	3.2 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	253 KG
FLUE GAS TEMPERATURE	172 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1 250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1442 MM
DEPTH	742 MM
WIDTH	887 MM

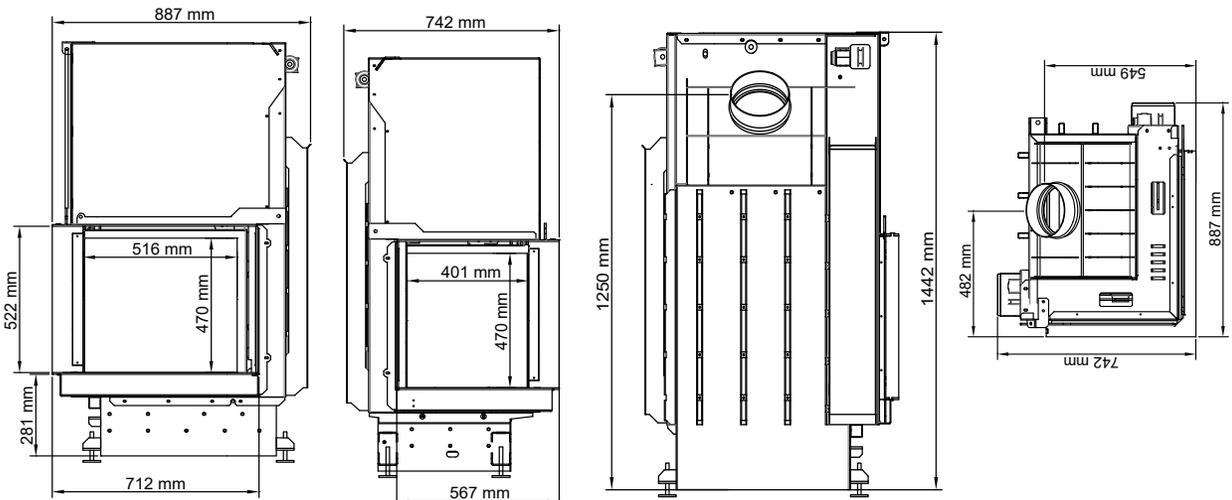

PREMIUM EDITION

QUATTRO 50 R

PATENTED GLASS CLEANING SYSTEM / EP4050263A1




TECHNICAL SPECIFICATION

MODEL	QUATTRO 50 R
POWER	6-12 KW
EFFICIENCY	>80 %
CONSUME	3.2 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	253 KG
FLUE GAS TEMPERATURE	172 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1442 MM
DEPTH	742 MM
WIDTH	887 MM

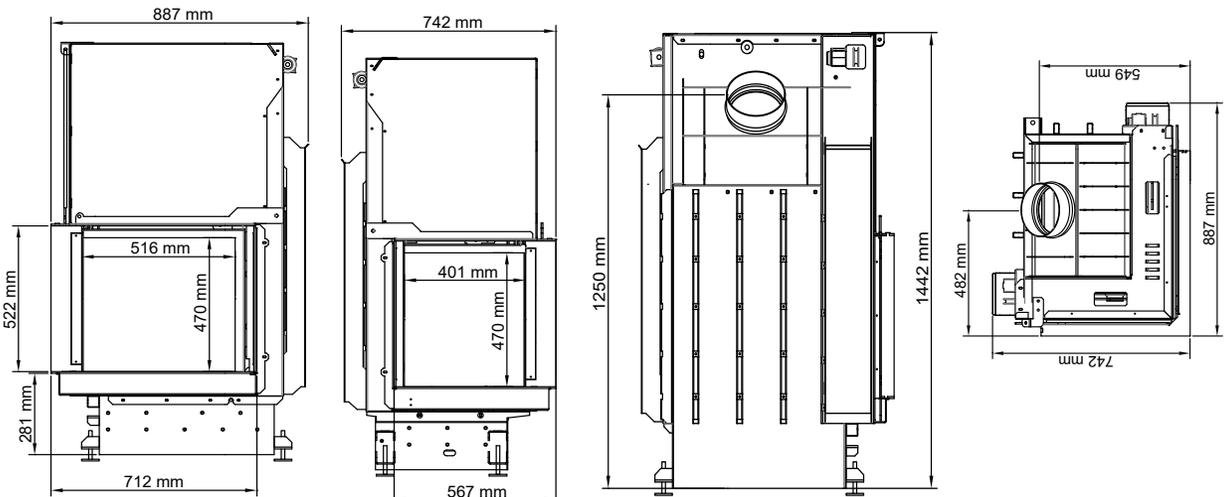

QUATTRO 70 L

PATENTED GLASS CLEANING SYSTEM / EP4050263A1




TECHNICAL SPECIFICATION

MODEL	QUATTRO 70 L
POWER	7-13 KW
EFFICIENCY	>80 %
CONSUME	3.7 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	294 KG
FLUE GAS TEMPERATURE	206 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1250 MG/M³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1442 MM
DEPTH	742 MM
WIDTH	1087 MM

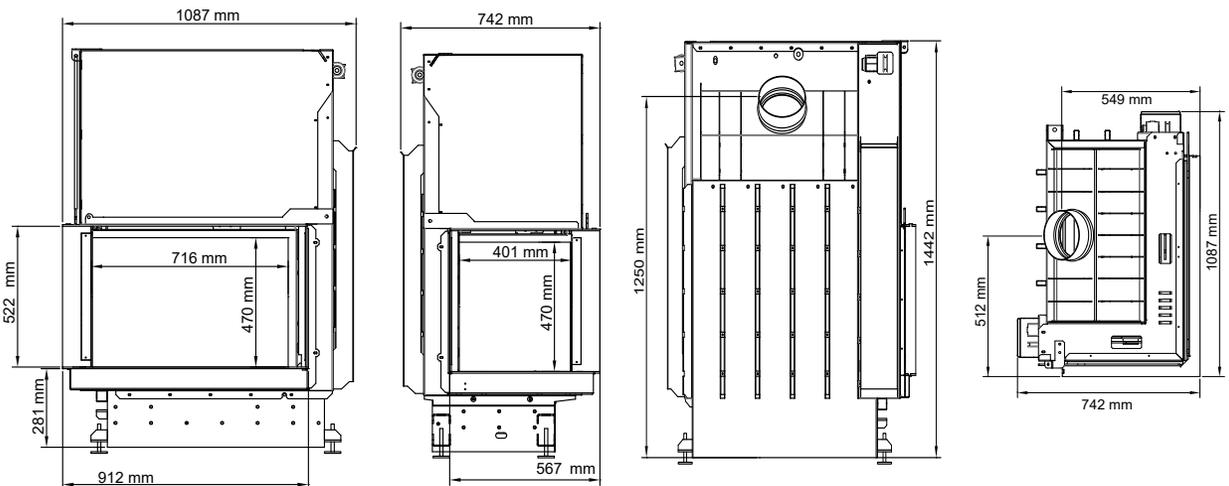

QUATTRO 70 R

PATENTED GLASS CLEANING SYSTEM / EP4050263A1







TECHNICAL SPECIFICATION

MODEL	QUATTRO 70 R
POWER	7-13 KW
EFFICIENCY	>80 %
CONSUME	3.7 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	294 KG
FLUE GAS TEMPERATURE	206 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1442 MM
DEPTH	742 MM
WIDTH	1087 MM

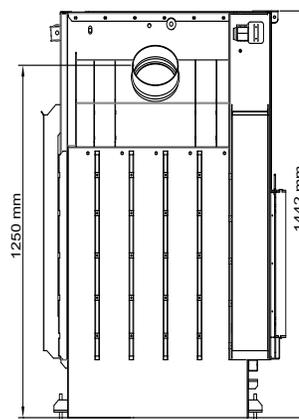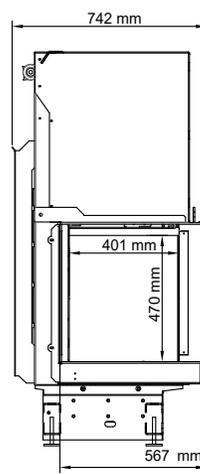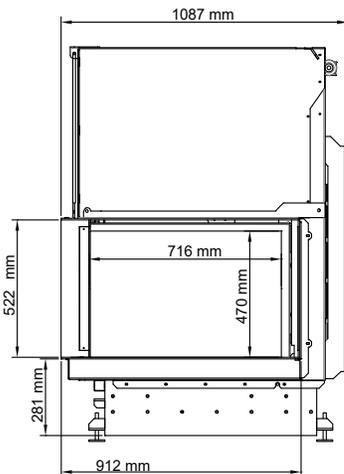

QUATTRO 90 L

PATENTED GLASS CLEANING SYSTEM / EP4050263A1




TECHNICAL SPECIFICATION

MODEL	QUATTRO 90 L
POWER	8-14.8 KW
EFFICIENCY	>80 %
CONSUME	4.3 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	333 KG
FLUE GAS TEMPERATURE	198 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1442 MM
DEPTH	742 MM
WIDTH	1287 MM

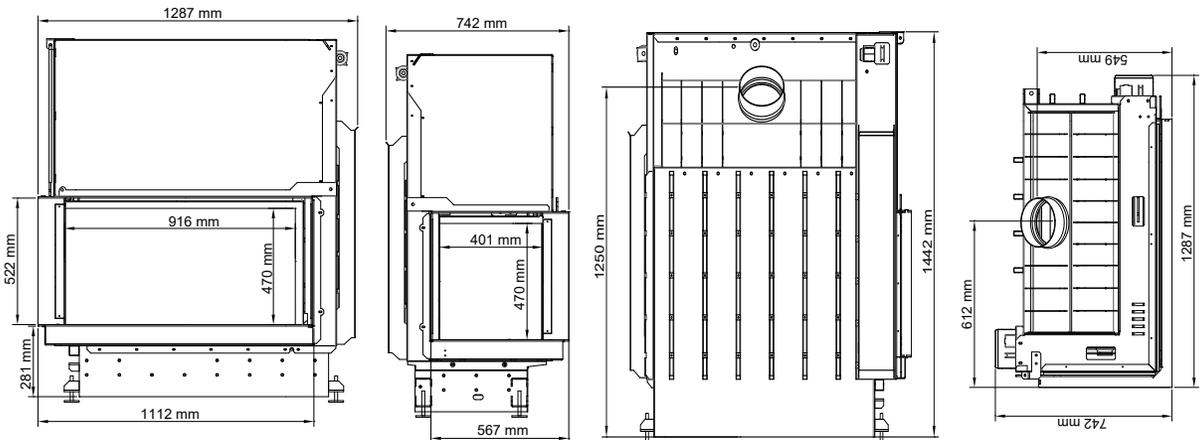

PREMIUM EDITION

QUATTRO 90 R

PATENTED GLASS CLEANING SYSTEM / EP4050263A1




TECHNICAL SPECIFICATION

MODEL	QUATTRO 90 R
POWER	8 - 14.8 KW
EFFICIENCY	>80 %
CONSUME	4.3 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	333 KG
FLUE GAS TEMPERATURE	198 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1442 MM
DEPTH	742 MM
WIDTH	1287 MM

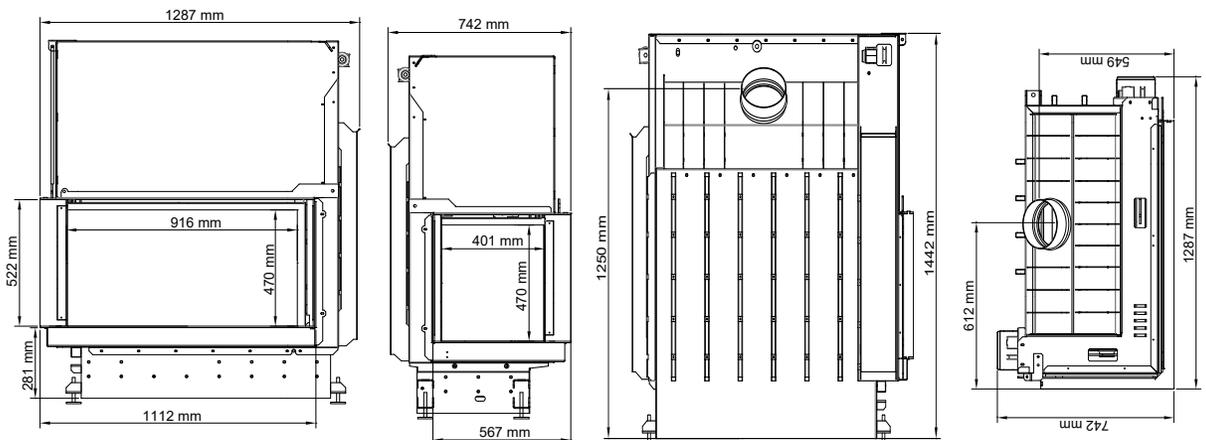

Crystal Series
GERMAN EDITION



Crystal 80 Max






TECHNICAL SPECIFICATION

MODEL	CRYSTAL 80 MAX
POWER	7-13 KW
EFFICIENCY	>80 %
CONSUME	2.2 KG/H
WOOD LENGTH	MAX.30 CM
HOT AIR OUTLET	2 X Ø 100 MM
WEIGHT	249 KG
FLUE GAS TEMPERATURE	220 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1300 MM
DEPTH	786 MM
WIDTH	948 MM

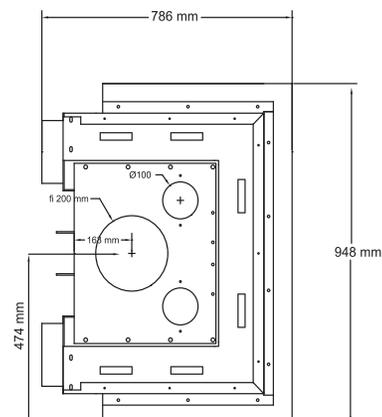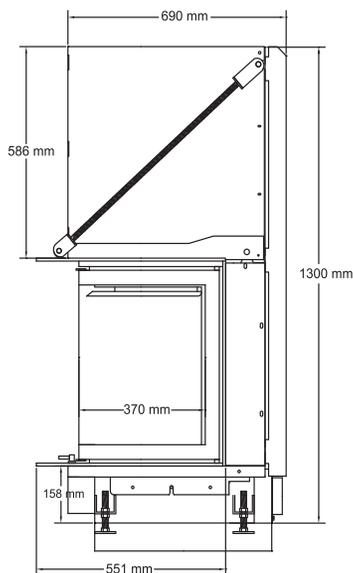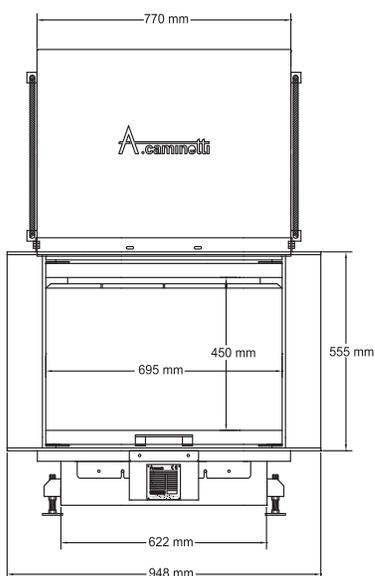

Crystal 90 Max






TECHNICAL SPECIFICATION

MODEL	CRYSTAL 90 MAX
POWER	10-17 KW
EFFICIENCY	>80 %
CONSUME	4.3 KG/H
WOOD LENGTH	MAX.30 CM
HOT AIR OUTLET	2 X Ø 100 MM
WEIGHT	275 KG
FLUE GAS TEMPERATURE	213 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1300 MM
DEPTH	786 MM
WIDTH	1098 MM

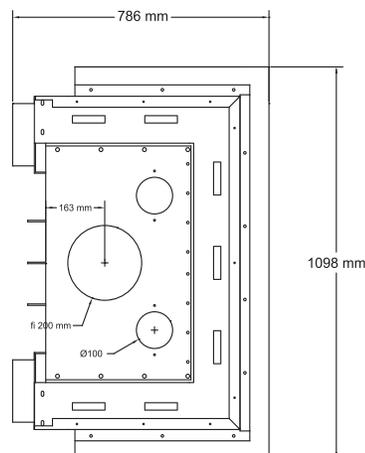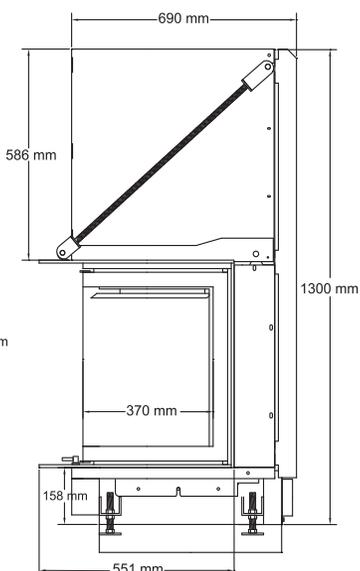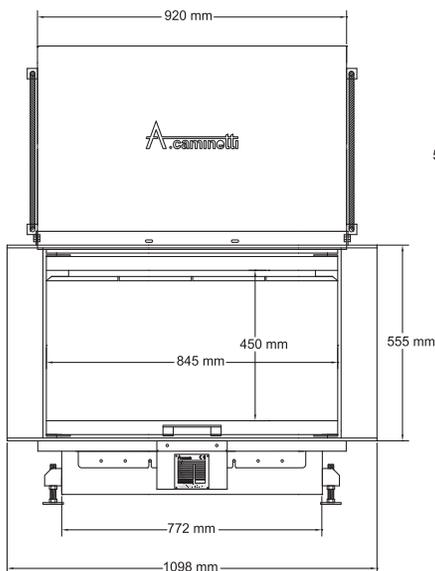

Crystal 110 Max






TECHNICAL SPECIFICATION

MODEL	CRYSTAL 110 MAX
POWER	13-18 KW
EFFICIENCY	>80 %
CONSUME	4.8 KG/H
WOOD LENGTH	MAX.30 CM
HOT AIR OUTLET	2 X Ø 100 MM
WEIGHT	302 KG
FLUE GAS TEMPERATURE	211 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1300 MM
DEPTH	786 MM
WIDTH	1248 MM

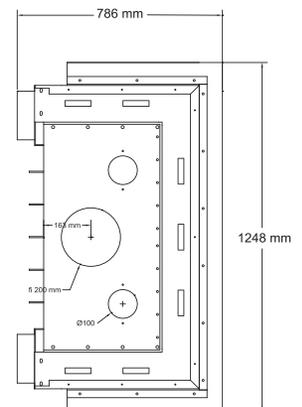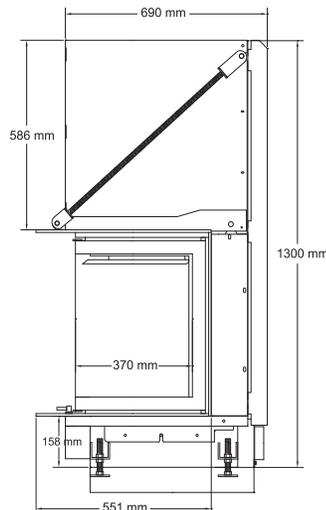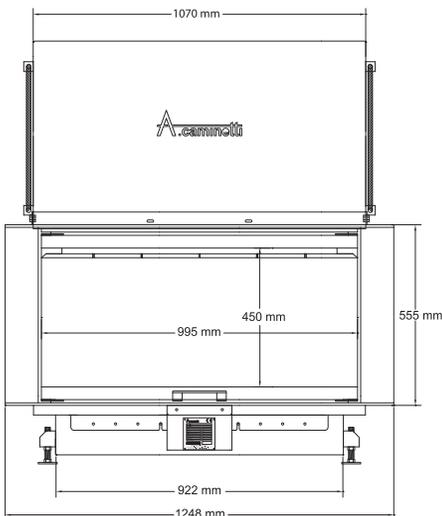

Crystal 3D 50/70






TECHNICAL SPECIFICATION

MODEL	CRYSTAL 3D 50/70
POWER	7-14 KW
EFFICIENCY	>80 %
CONSUME	2.7 KG/H
WOOD LENGTH	MAX.30 CM
HOT AIR OUTLET	2 X Ø 100 MM
WEIGHT	285 KG
FLUE GAS TEMPERATURE	218 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1300 MM
DEPTH	738 MM
WIDTH	1074 MM

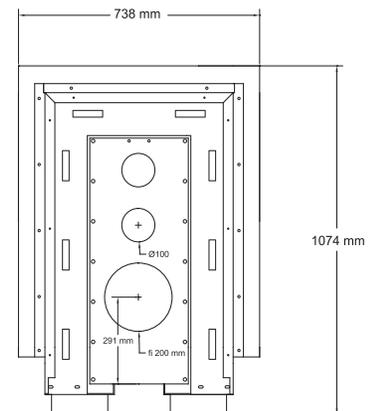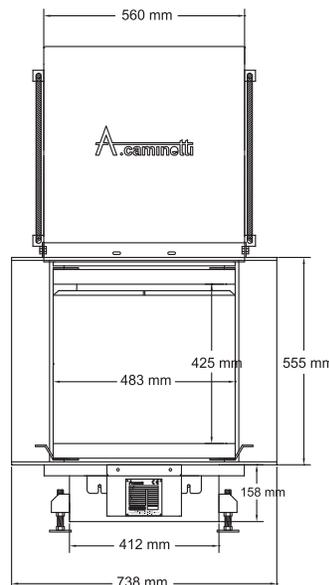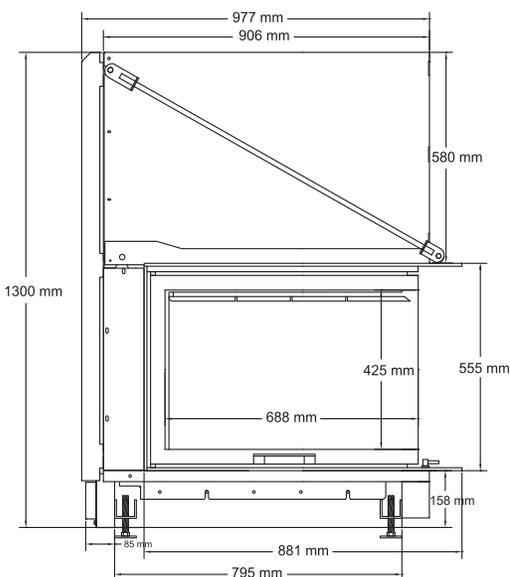

Crystal 3D Max


TECHNICAL SPECIFICATION

MODEL	CRYSTAL 3D MAX
POWER	13-17 KW
EFFICIENCY	>80 %
CONSUME	4.3 KG/H
WOOD LENGTH	MAX.30 CM
HOT AIR OUTLET	2 X Ø 100 MM
WEIGHT	317 KG
FLUE GAS TEMPERATURE	220 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1300 MM
DEPTH	738 MM
WIDTH	1174 MM

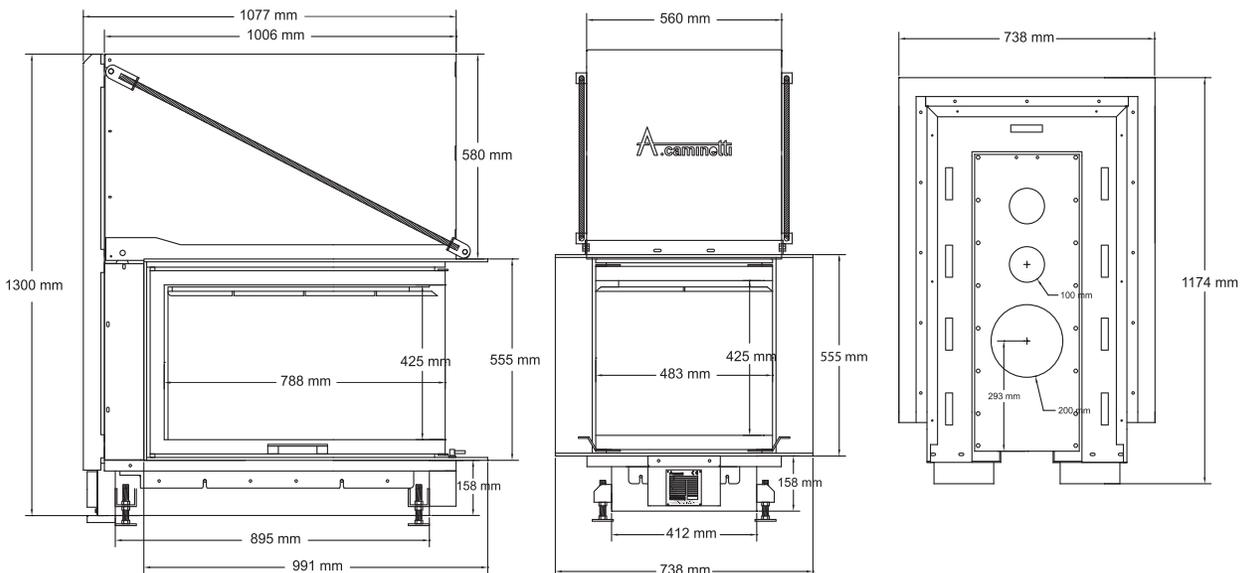



A.caminetti

Quattro Series
GERMAN EDITION

Quattro 80 L






TECHNICAL SPECIFICATION

MODEL	QUATTRO 80 L
POWER	7-13 KW
EFFICIENCY	>80 %
CONSUME	3.2 KG/H
WOOD LENGTH	MAX.30 CM
HOT AIR OUTLET	2 X Ø 100 MM
WEIGHT	249 KG
FLUE GAS TEMPERATURE	172 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1300 MM
DEPTH	783 MM
WIDTH	1012 MM

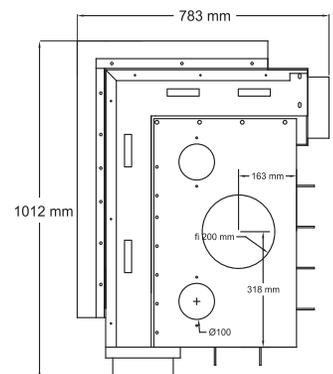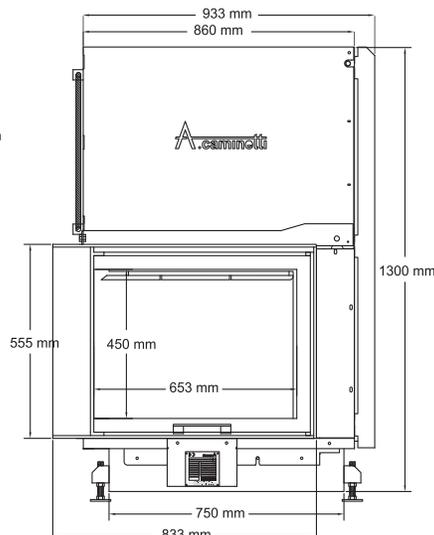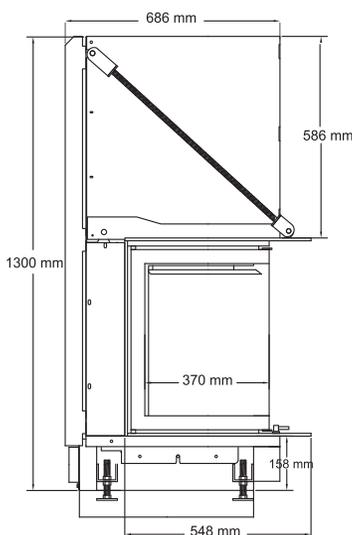

Quattro 80 R






TECHNICAL SPECIFICATION

MODEL	QUATTRO 80 R
POWER	7-13 KW
EFFICIENCY	>80 %
CONSUME	3.2 KG/H
WOOD LENGTH	MAX.30 CM
HOT AIR OUTLET	2 X Ø 100 MM
WEIGHT	249 KG
FLUE GAS TEMPERATURE	172 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1300 MM
DEPTH	783 MM
WIDTH	1012 MM

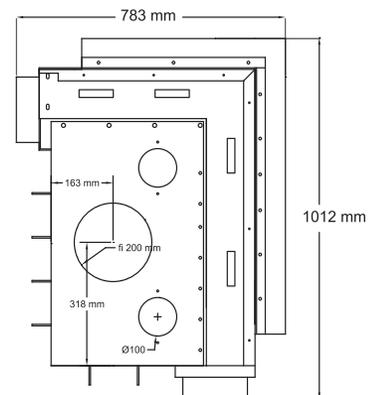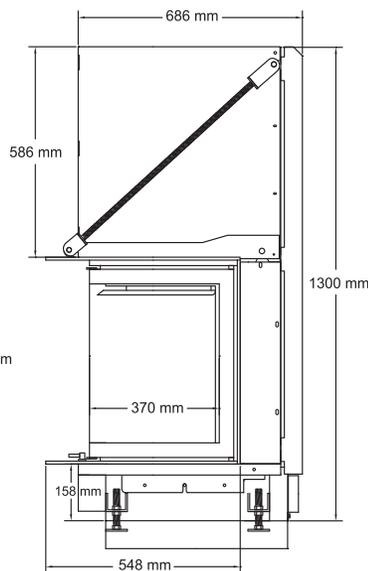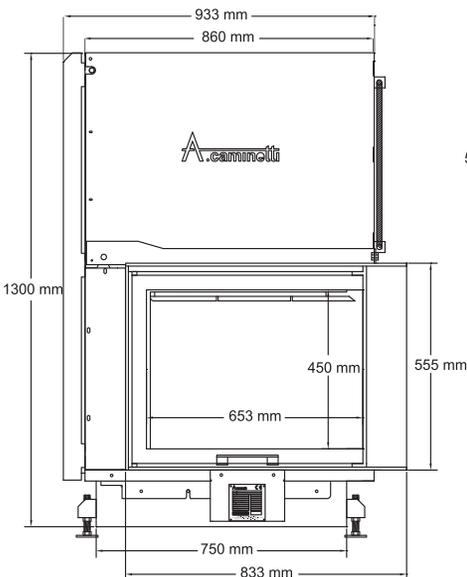

Quattro 90 L




TECHNICAL SPECIFICATION

MODEL	QUATTRO 90 L
POWER	8-14 KW
EFFICIENCY	>80 %
CONSUME	3.7 KG/H
WOOD LENGTH	MAX.30 CM
HOT AIR OUTLET	2 X Ø 100 MM
WEIGHT	265 KG
FLUE GAS TEMPERATURE	206 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1300 MM
DEPTH	783 MM
WIDTH	1112 MM

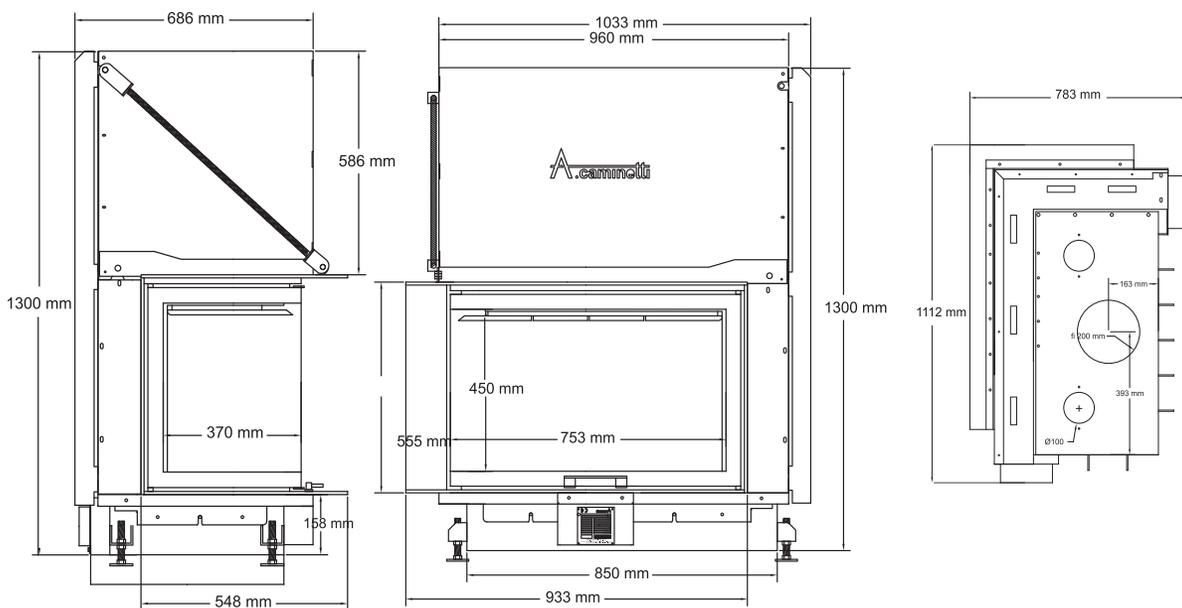

Quattro 90 R




TECHNICAL SPECIFICATION

MODEL	QUATTRO 90 R
POWER	8-14 KW
EFFICIENCY	>80 %
CONSUME	3.7 KG/H
WOOD LENGTH	MAX.30 CM
HOT AIR OUTLET	2 X Ø 100 MM
WEIGHT	265 KG
FLUE GAS TEMPERATURE	206 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1300 MM
DEPTH	783 MM
WIDTH	1112 MM

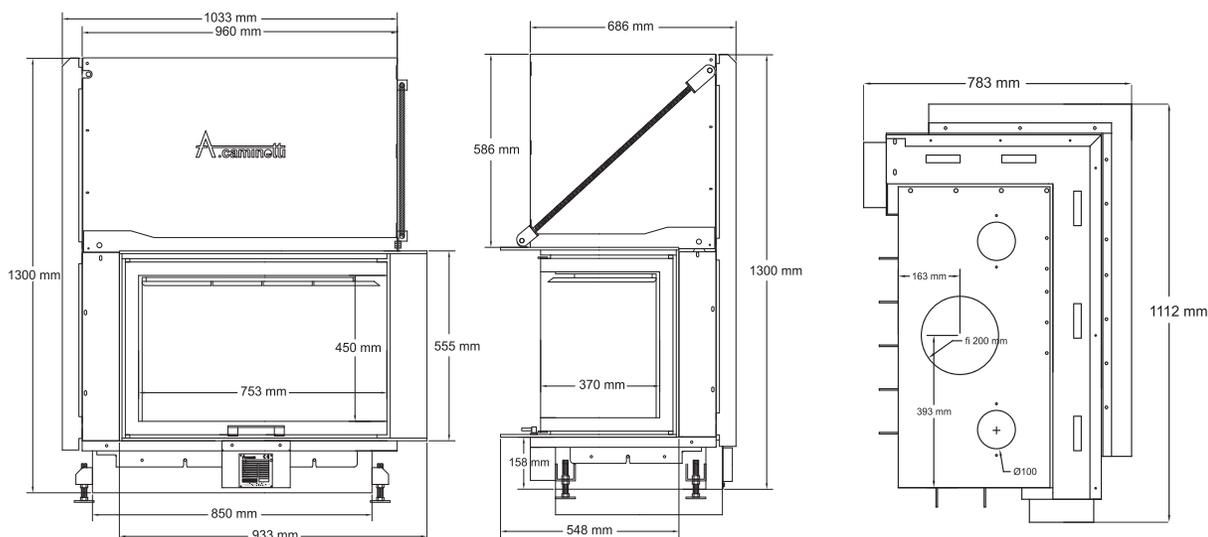

Quattro 100 L




TECHNICAL SPECIFICATION

MODEL	QUATTRO 100 L
POWER	13-17 KW
EFFICIENCY	>80 %
CONSUME	4.3 KG/H
WOOD LENGTH	MAX.30 CM
HOT AIR OUTLET	2 X Ø 100 MM
WEIGHT	354 KG
FLUE GAS TEMPERATURE	198 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1300 MM
DEPTH	783 MM
WIDTH	1212 MM

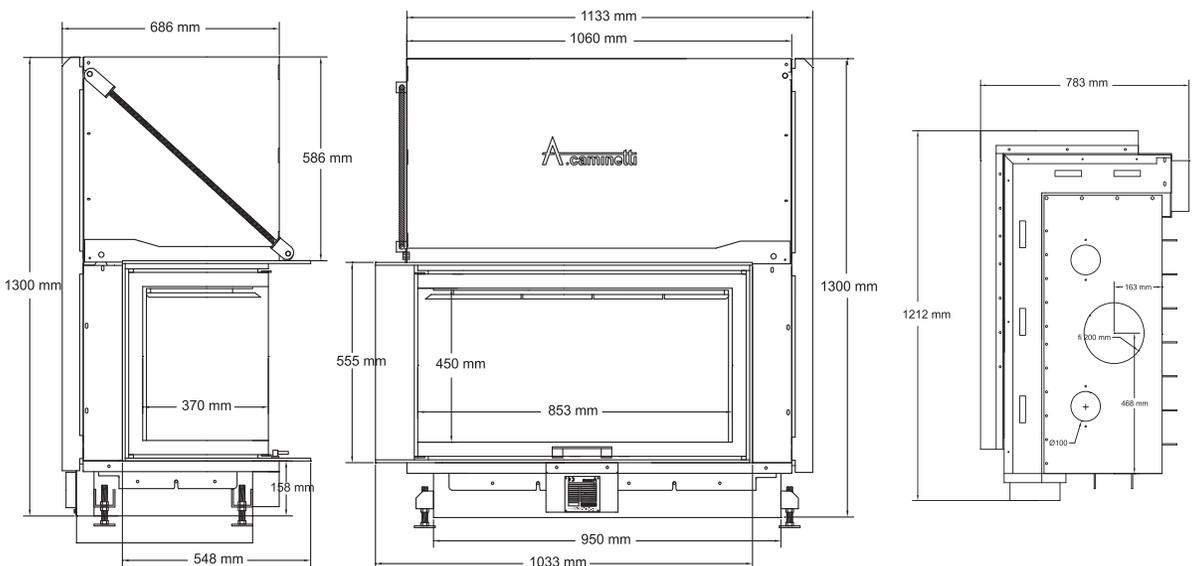

Quattro 100 R






TECHNICAL SPECIFICATION

MODEL	QUATTRO 100 R
POWER	13-17 KW
EFFICIENCY	>80 %
CONSUME	4.3 KG/H
WOOD LENGTH	MAX.30 CM
HOT AIR OUTLET	2 X Ø 100 MM
WEIGHT	354 KG
FLUE GAS TEMPERATURE	198 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1 250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1300 MM
DEPTH	783 MM
WIDTH	1212 MM

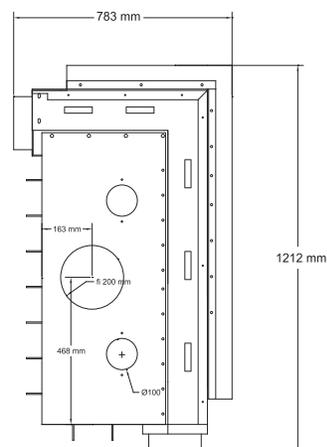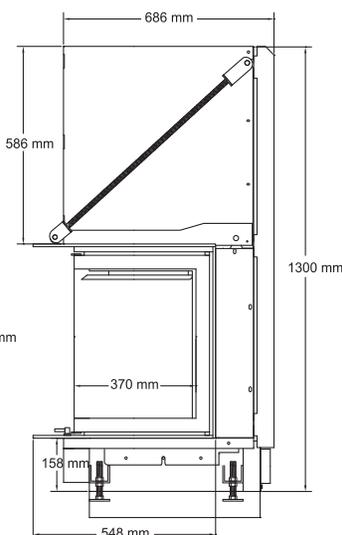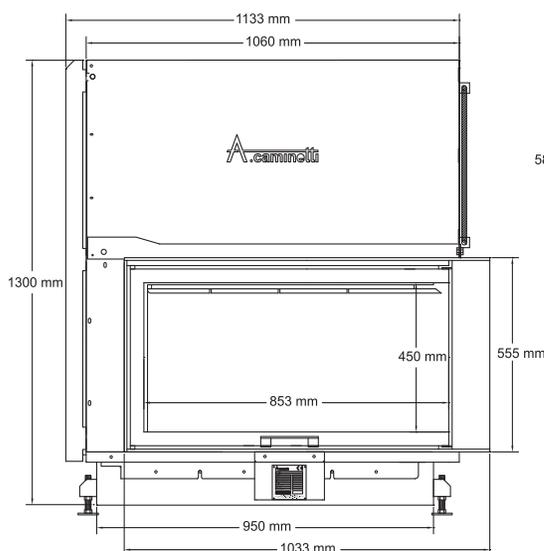

A.camineti

Flat Series
GERMAN EDITION



Flat 75/50






TECHNICAL SPECIFICATION

MODEL	FLAT 75/50
POWER	7-14 KW
EFFICIENCY	>80 %
CONSUME	3.5 KG/H
WOOD LENGTH	MAX.30 CM
HOT AIR OUTLET	2 X Ø 100 MM
WEIGHT	283 KG
FLUE GAS TEMPERATURE	186 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1490 MM
DEPTH	605 MM
WIDTH	1112 MM

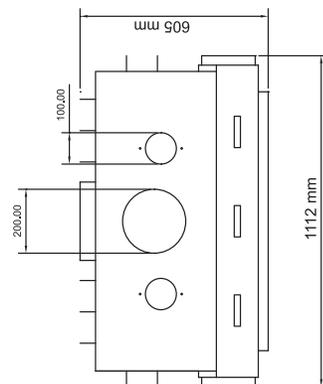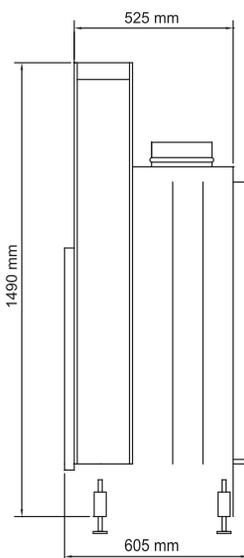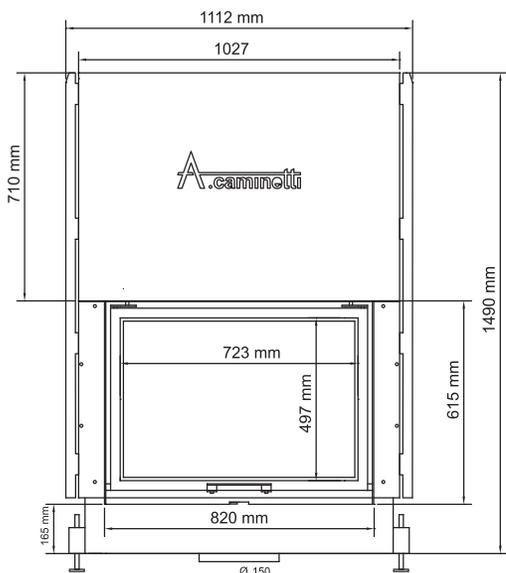

Flat 75/60






TECHNICAL SPECIFICATION

MODEL	FLAT 75/60
POWER	9 - 15 KW
EFFICIENCY	>80 %
CONSUME	3.8 KG/H
WOOD LENGTH	MAX.30 CM
HOT AIR OUTLET	2 X Ø 100 MM
WEIGHT	302 KG
FLUE GAS TEMPERATURE	191 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1590 MM
DEPTH	605 MM
WIDTH	1112 MM

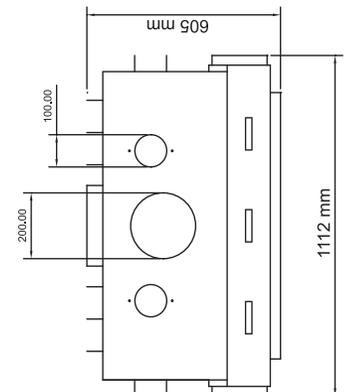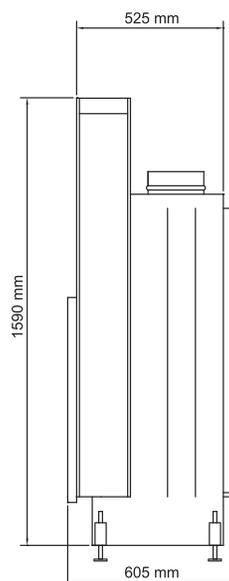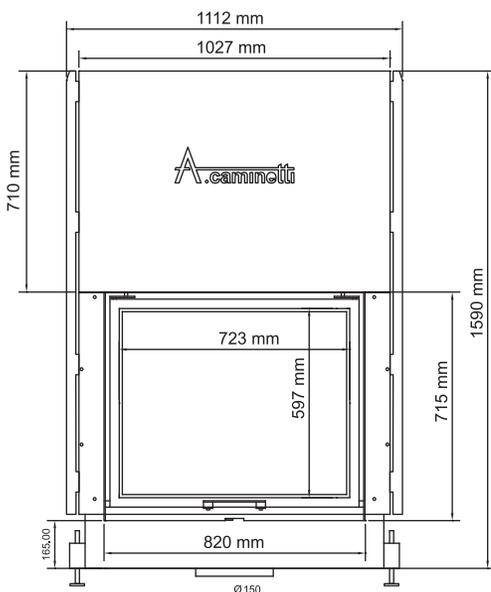

Flat 90/50





TECHNICAL SPECIFICATION

MODEL	FLAT 90/50
POWER	13-18 KW
EFFICIENCY	>80 %
CONSUME	4.6 KG/H
WOOD LENGTH	MAX.30 CM
HOT AIR OUTLET	4 X Ø 100 MM
WEIGHT	315 KG
FLUE GAS TEMPERATURE	207 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1250 MG/M³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1490 MM
DEPTH	605 MM
WIDTH	1262 MM

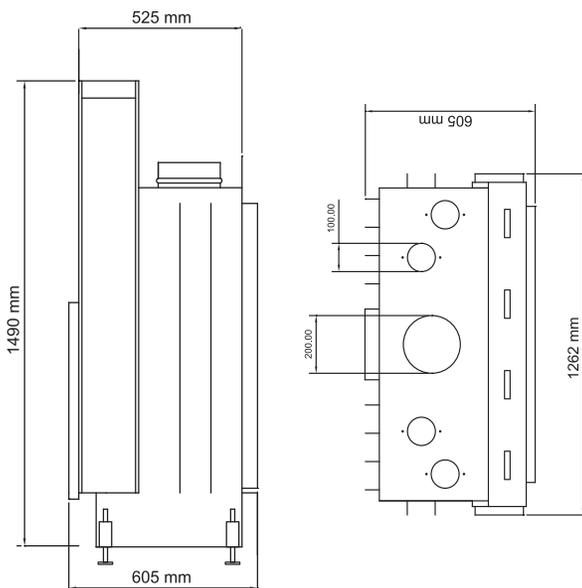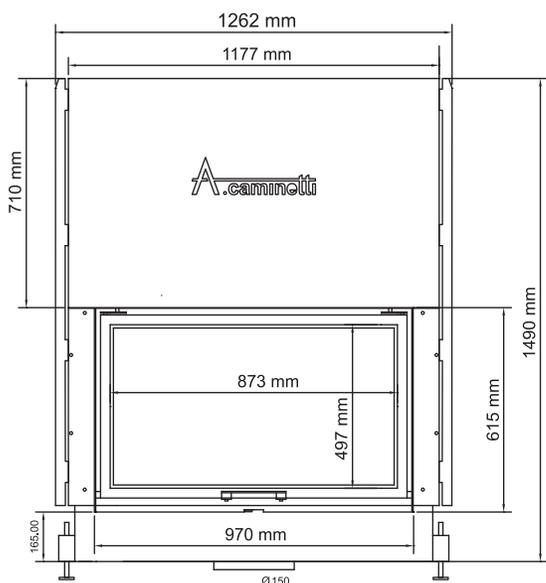

Flat 90/60




TECHNICAL SPECIFICATION

MODEL	FLAT 90/60
POWER	13-19 KW
EFFICIENCY	>80 %
CONSUME	4.9 KG/H
WOOD LENGTH	MAX.30 CM
HOT AIR OUTLET	4 X Ø 100 MM
WEIGHT	333 KG
FLUE GAS TEMPERATURE	212 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1590 MM
DEPTH	605 MM
WIDTH	1262 MM

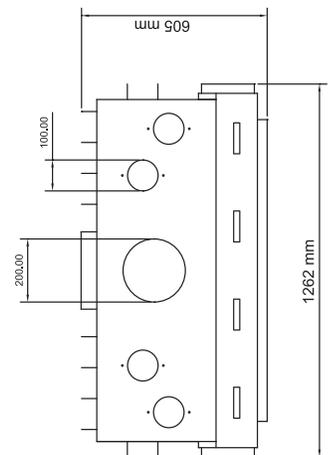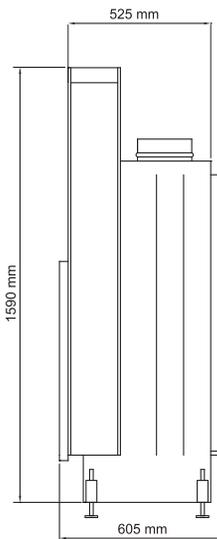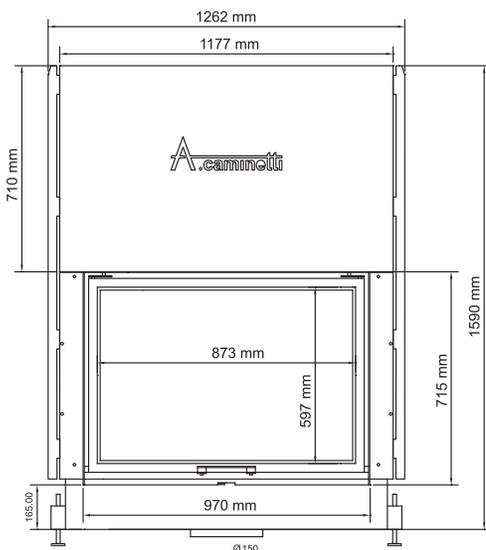

Flat 90/70






TECHNICAL SPECIFICATION

MODEL	FLAT 90/70
POWER	13-19 KW
EFFICIENCY	>80 %
CONSUME	4.9 KG/H
WOOD LENGTH	MAX.30 CM
HOT AIR OUTLET	4 X Ø 100 MM
WEIGHT	369 KG
FLUE GAS TEMPERATURE	212 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1690 MM
DEPTH	605 MM
WIDTH	1262 MM

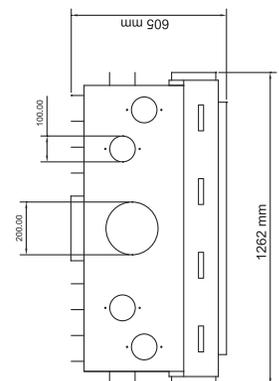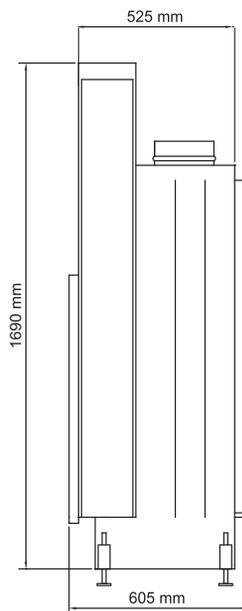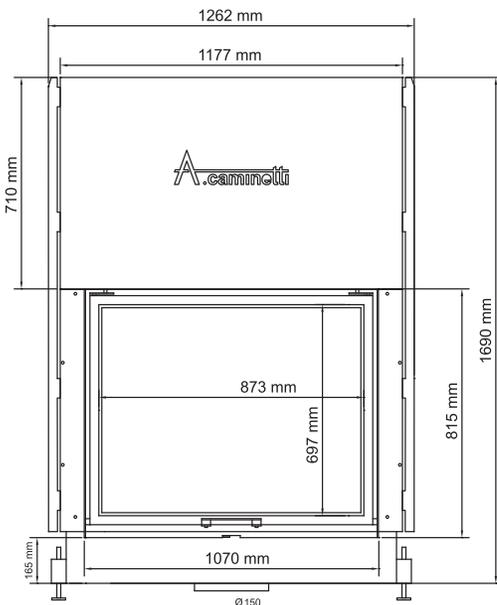

Flat 120/50






TECHNICAL SPECIFICATION

MODEL	FLAT 120/50
POWER	15 - 21 KW
EFFICIENCY	>80 %
CONSUME	5.4 KG/H
WOOD LENGTH	MAX.30 CM
HOT AIR OUTLET	4 X Ø 100 MM
WEIGHT	400 KG
FLUE GAS TEMPERATURE	222 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 250 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1490 MM
DEPTH	605 MM
WIDTH	1562 MM

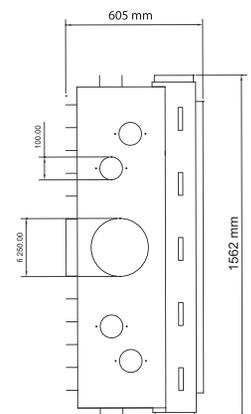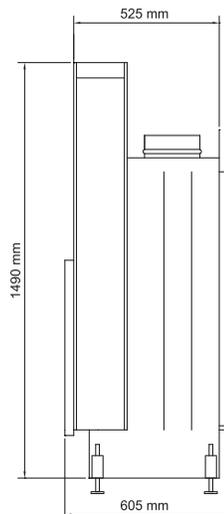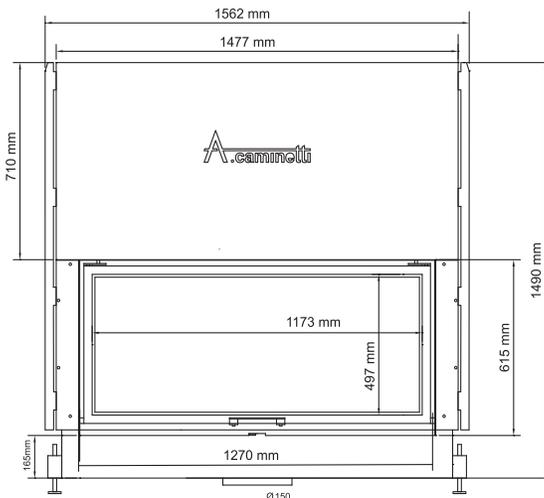

Flat W 75/60






TECHNICAL SPECIFICATION

MODEL	FLAT W 75/60
POWER	9 - 15 KW
EFFICIENCY	>80 %
CONSUME	3.8 KG/H
WOOD LENGTH	MAX.30 CM
HOT AIR OUTLET	4 X Ø 100 MM
WEIGHT	328 KG
FLUE GAS TEMPERATURE	250 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1590 MM
DEPTH	640 MM
WIDTH	1112 MM

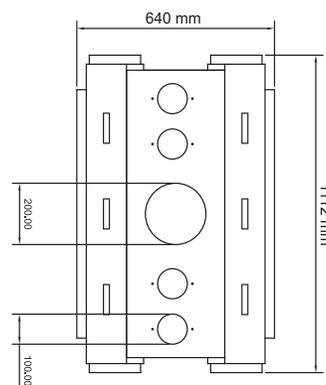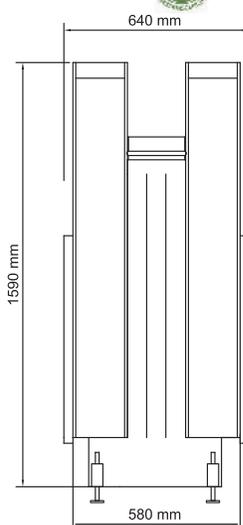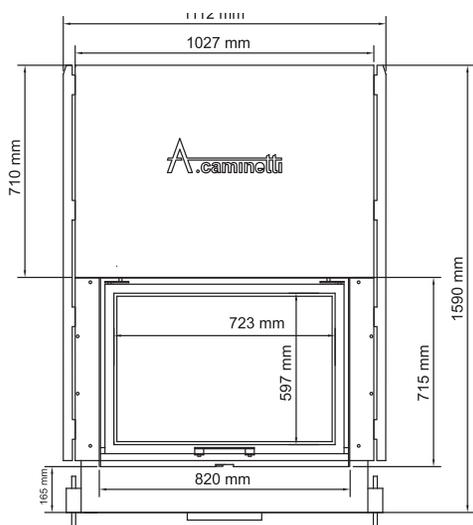

Flat W 90/60





TECHNICAL SPECIFICATION

MODEL	FLAT W 90/60
POWER	13 - 19 KW
EFFICENCY	>80 %
CONSUME	4.9 KG/H
WOOD LENGTH	MAX.30 CM
HOT AIR OUTLET	4 X Ø 100 MM
WEIGHT	383 KG
FLUE GAS TEMPERATURE	258 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 200 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1590 MM
DEPTH	640 MM
WIDTH	1262 MM

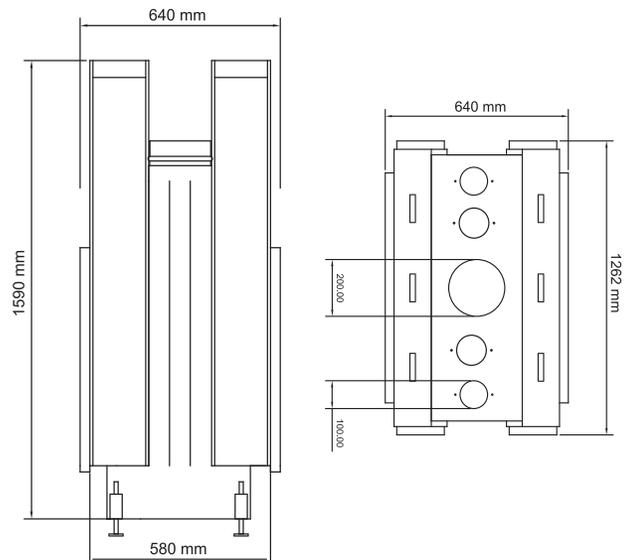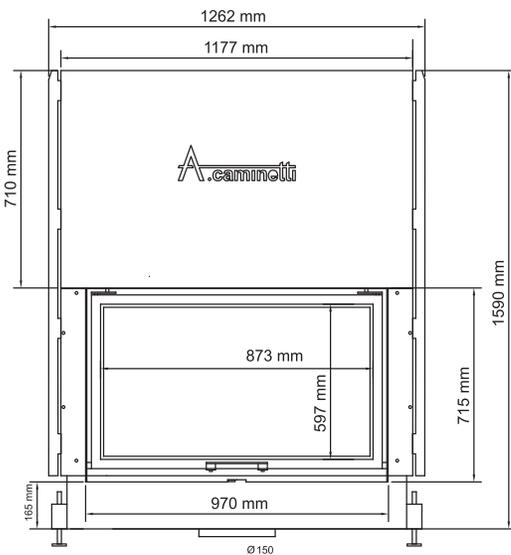

Flat W 120/60






TECHNICAL SPECIFICATION

MODEL	FLAT W 120/60
POWER	15 - 21 KW
EFFICENCY	>80 %
CONSUME	5.4 KG/H
WOOD LENGTH	MAX.30 CM
HOT AIR OUTLET	4 X Ø 100 MM
WEIGHT	416 KG
FLUE GAS TEMPERATURE	265 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 250 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS




OVERALL DIMENSION

HEIGHT	1590 MM
DEPTH	640 MM
WIDTH	1562 MM

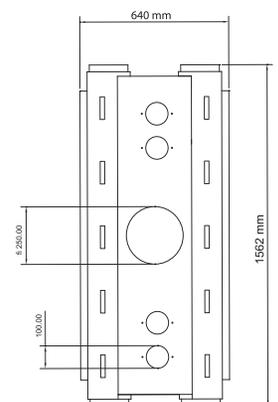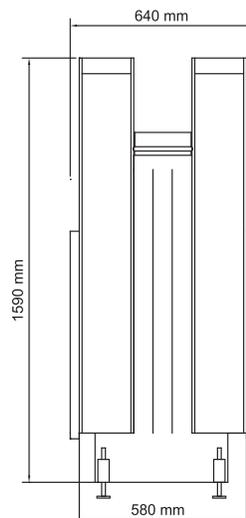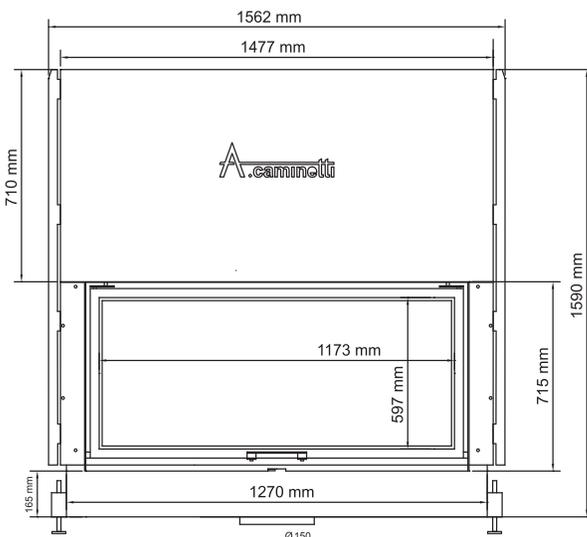

A.caminetti

Freestanding Series

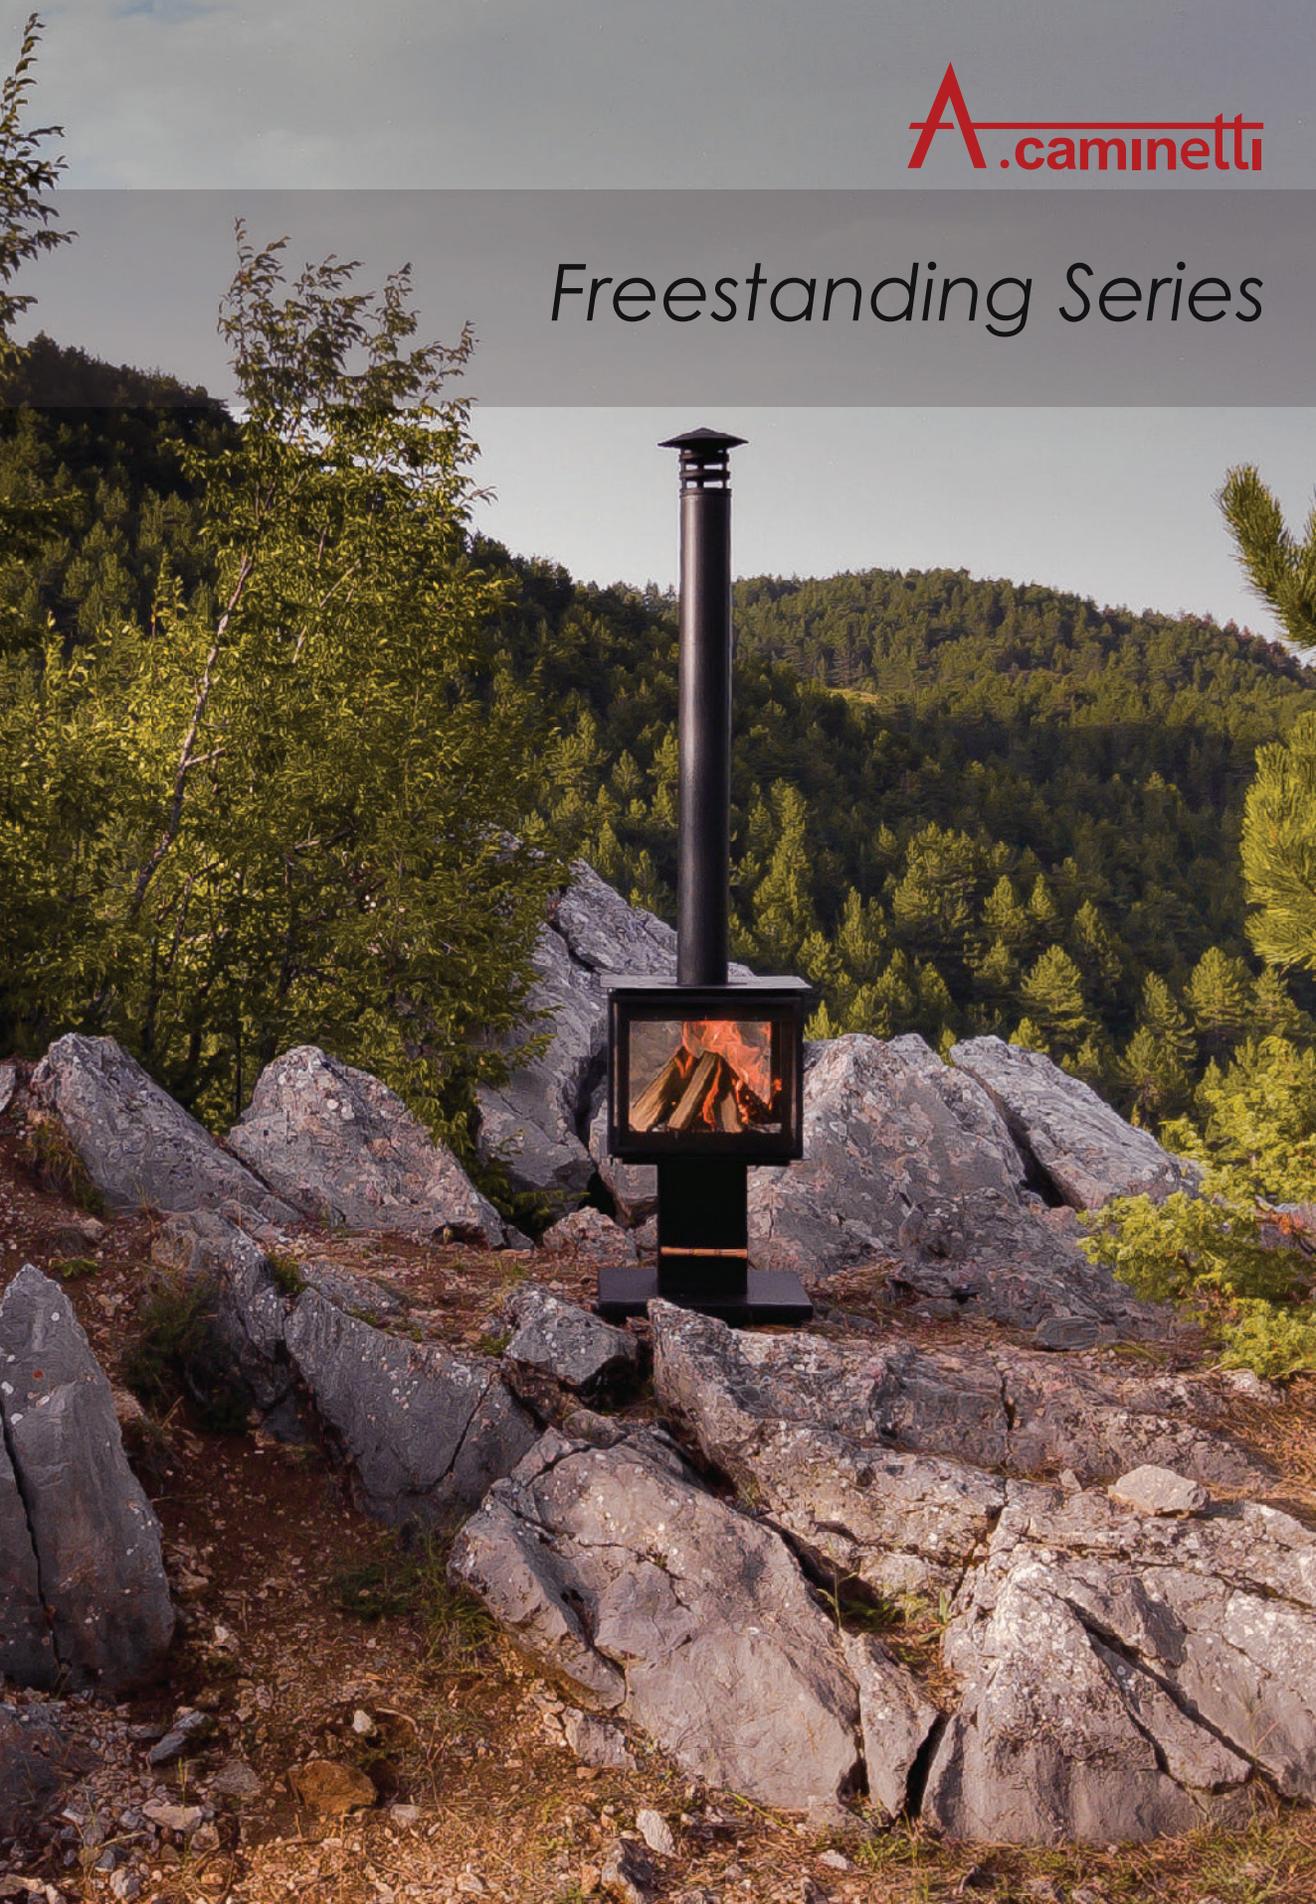

FREESTANDING SERIES

MODEL SCANDINAVIAN 65 S BH





TECHNICAL SPECIFICATION

MODEL	SCANDINAVIAN 65 S BH
POWER	7 - 11 KW
EFFICIENCY	>80 %
CONSUME	2-3.5 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	236 KG
FLUE GAS TEMPERATURE	222 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Φ 180 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Φ 100 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1680 MM
DEPTH	566 MM
WIDTH	691 MM

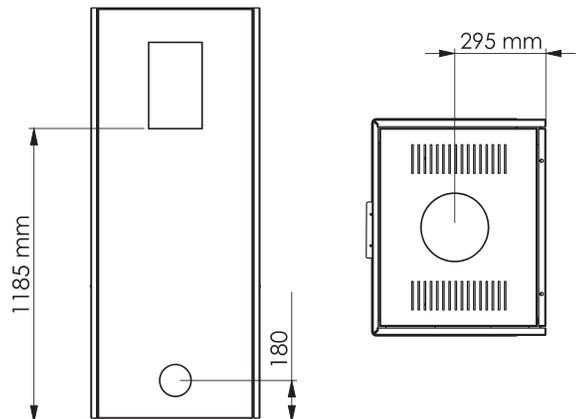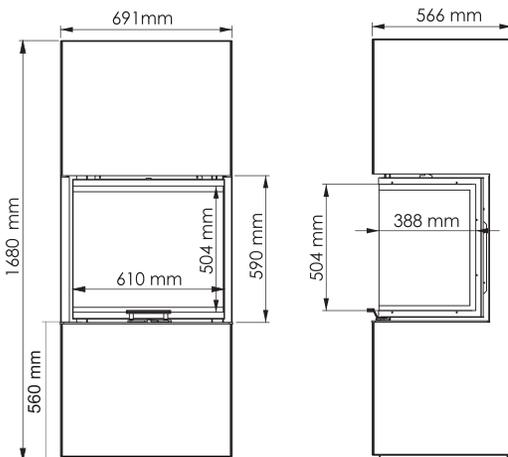

MODEL SCANDINAVIAN 65 S WH

TECHNICAL SPECIFICATION




MODEL	SCANDINAVIAN 65 S WH
POWER	7 - 11 KW
EFFICIENCY	>80 %
CONSUME	2- 3.5 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	236 KG
FLUE GAS TEMPERATURE	222 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Φ 180 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Φ 100 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1680 MM
DEPTH	566 MM
WIDTH	691 MM

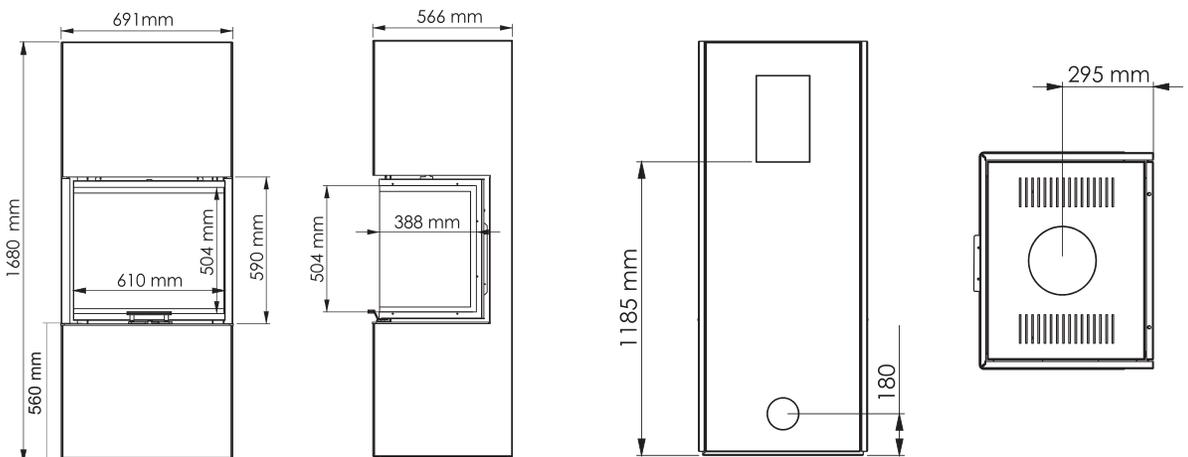

MODEL SCANDINAVIAN 50 S BH




TECHNICAL SPECIFICATION

MODEL	SCANDINAVIAN 50 S BH
POWER	7 - 11 KW
EFFICENCY	>80 %
CONSUME	2-3.5 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	218 KG
FLUE GAS TEMPERATURE	222 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 180 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 100 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1680 MM
DEPTH	566 MM
WIDTH	591 MM

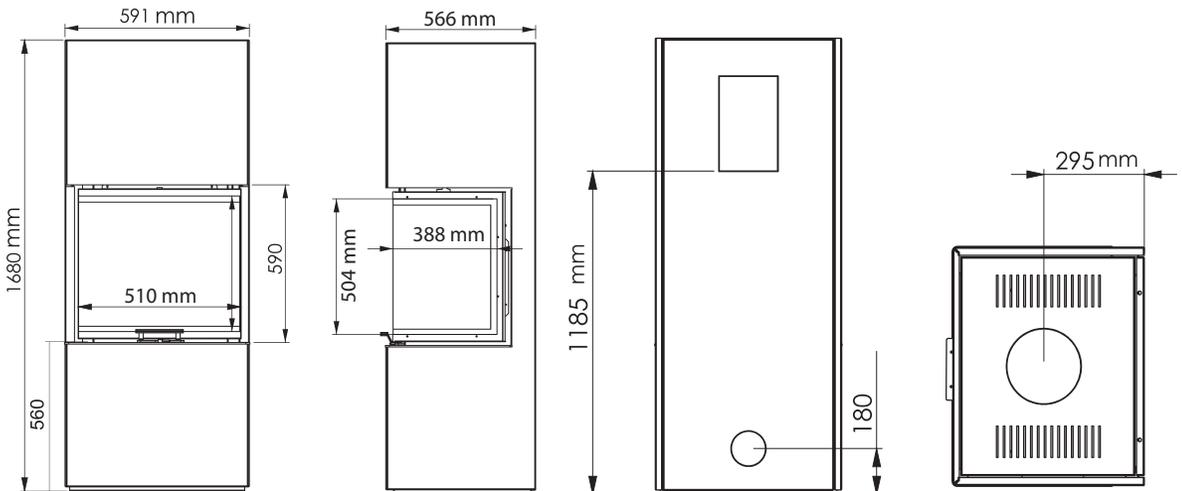

FREESTANDING SERIES

MODEL SCANDINAVIAN 50 S WH




TECHNICAL SPECIFICATION

MODEL	SCANDINAVIAN 50 S WH
POWER	7 - 11 KW
EFFICIENCY	>80 %
CONSUME	2-3.5 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	218 KG
FLUE GAS TEMPERATURE	222 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 180 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 100 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1680 MM
DEPTH	566 MM
WIDTH	591 MM

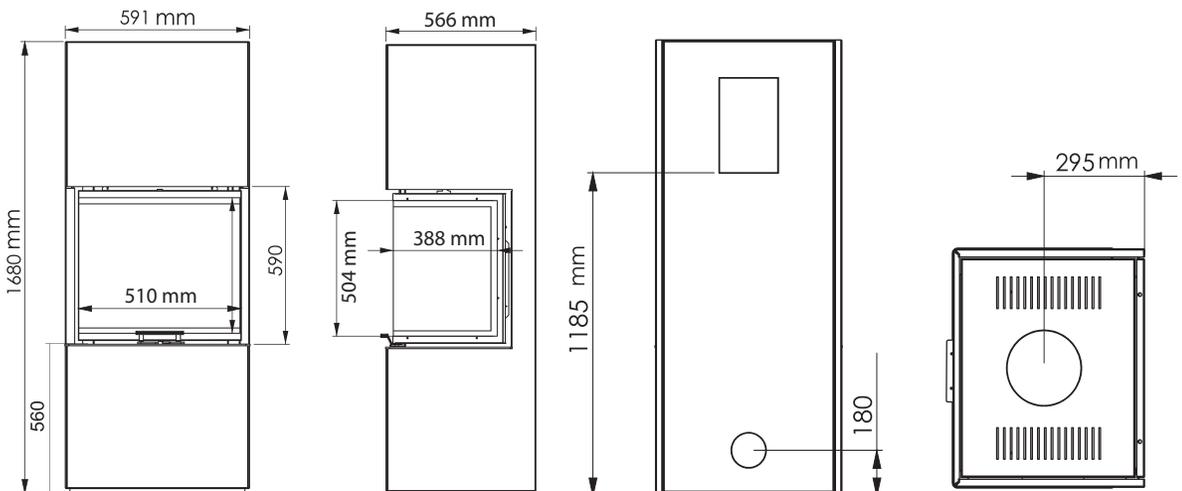

MODEL SCANDINAVIAN 50 BH




TECHNICAL SPECIFICATION

MODEL	SCANDINAVIAN 50 BH
POWER	5 - 9 KW
EFFICIENCY	>80 %
CONSUME	2 - 3.5 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	155 KG
FLUE GAS TEMPERATURE	222 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 180 MM
CO	<1250 MG/M³
FRESH AIR INLET	Ø 100 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1650 MM
DEPTH	487 MM
WIDTH	539 MM

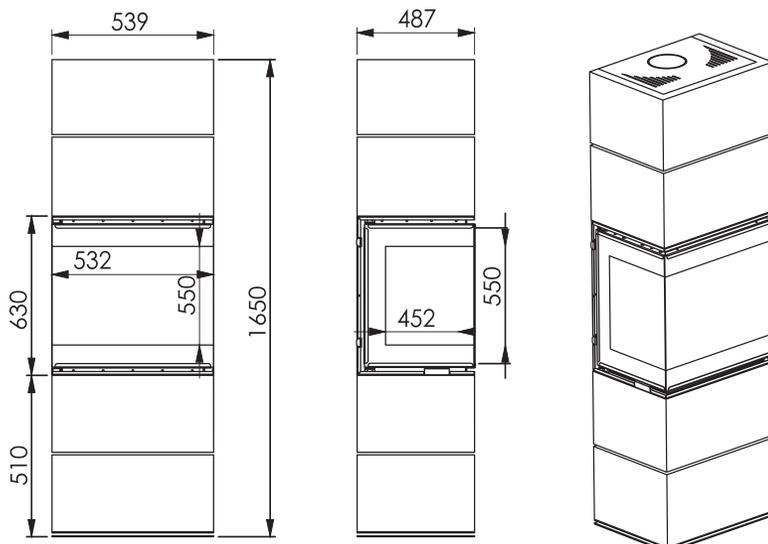

FREESTANDING SERIES

MODEL SCANDINAVIAN 50 WH






TECHNICAL SPECIFICATION

MODEL	SCANDINAVIAN 50 WH
POWER	5 - 9 KW
EFFICIENCY	>80 %
CONSUME	2 - 3.5 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	155 KG
FLUE GAS TEMPERATURE	222 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Φ 180 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Φ 100 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1650 MM
DEPTH	487 MM
WIDTH	539 MM

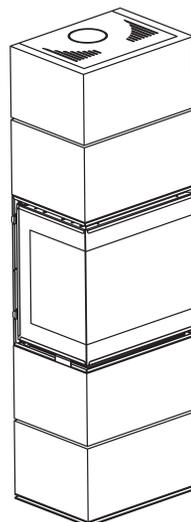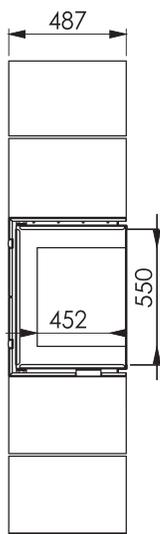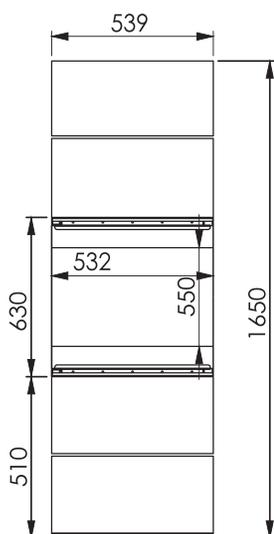

FREESTANDING SERIES

MODEL SCANDINAVIAN 65 BH






TECHNICAL SPECIFICATION

MODEL	SCANDINAVIAN 65 BH
POWER	7 - 11 KW
EFFICIENCY	>80%
CONSUME	2 - 3.5 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	180 KG
FLUE GAS TEMPERATURE	222 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 180 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 100 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1650 MM
DEPTH	487 MM
WIDTH	669 MM

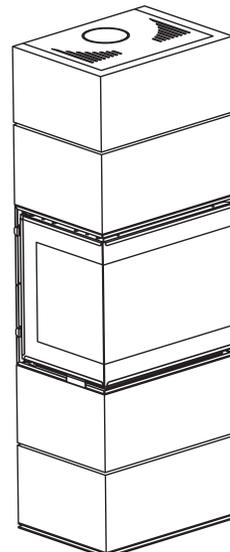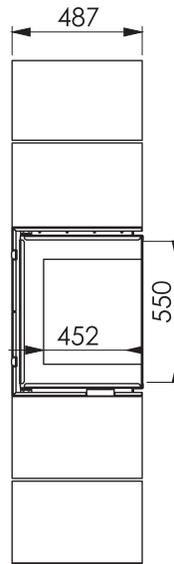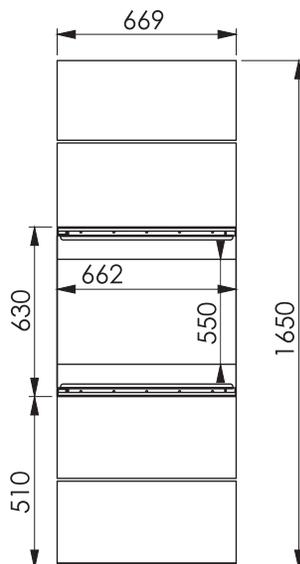






TECHNICAL SPECIFICATION

MODEL	SCANDINAVIAN 65 WH
POWER	7 - 11 KW
EFFICIENCY	>80 %
CONSUME	2 - 3.5 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	180 KG
FLUE GAS TEMPERATURE	222 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 180 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 100 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1650 MM
DEPTH	487 MM
WIDTH	669 MM

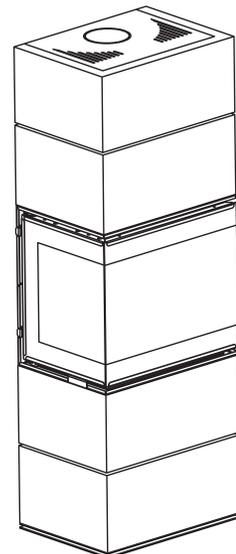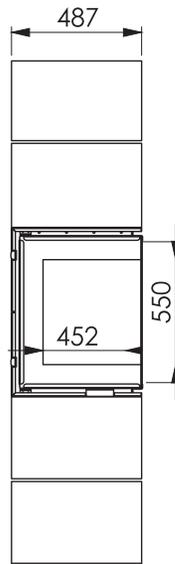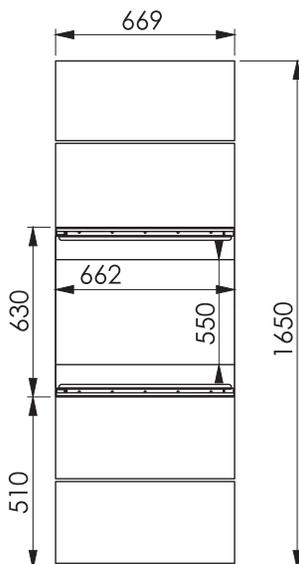

FREESTANDING SERIES

MODEL MEDITERRANEAN C65






TECHNICAL SPECIFICATION

MODEL	MEDITERRANEAN C65
POWER	7 - 11 KW
EFFICIENCY	>80 %
CONSUME	2-3,5 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	180 KG
FLUE GAS TEMPERATURE	222 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 180 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 100 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	2225 MM
DEPTH	486 MM
WIDTH	962 MM

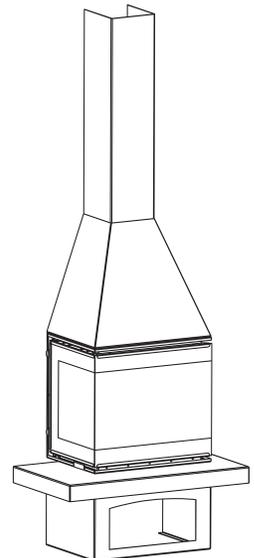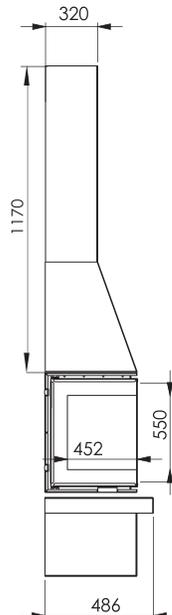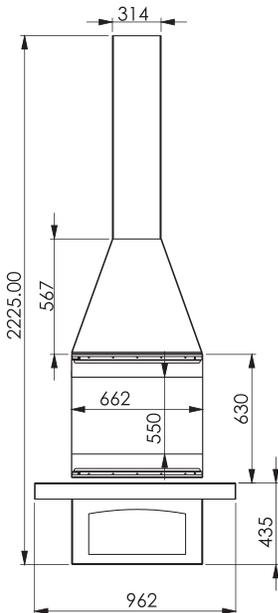

FREESTANDING SERIES

MODEL SCANDINAVIAN 50




TECHNICAL SPECIFICATION

MODEL	SCANDINAVIAN 50
POWER	5-9 KW
EFFICIENCY	>80 %
CONSUME	2-3.5 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	116 KG
FLUE GAS TEMPERATURE	222 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 180 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 100 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	980 MM
DEPTH	487 MM
WIDTH	538 MM

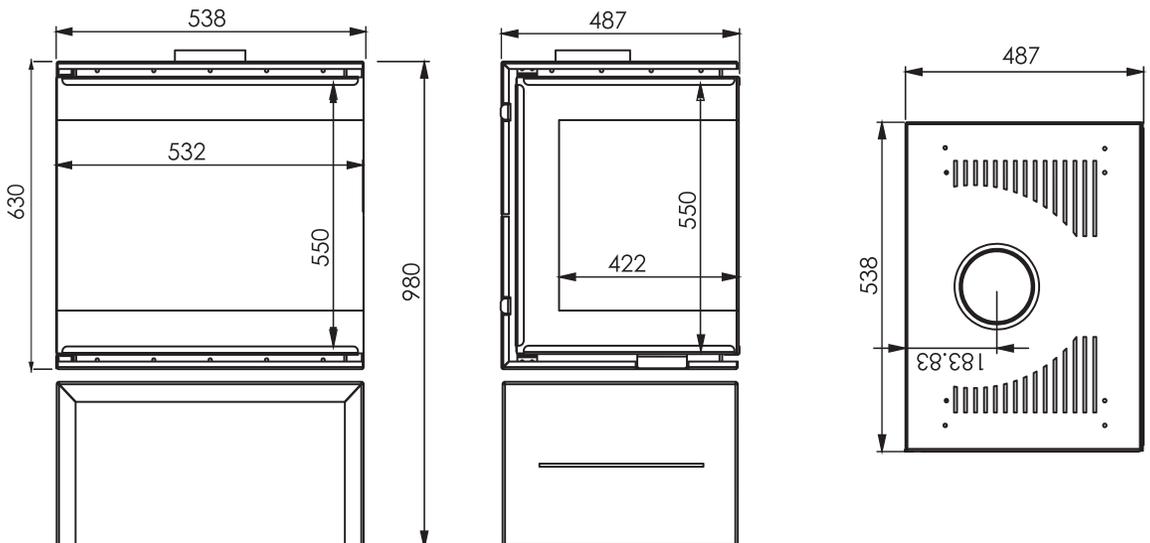

FREESTANDING SERIES

MODEL SCANDINAVIAN 65

TECHNICAL SPECIFICATION






MODEL	SCANDINAVIAN 65
POWER	7 - 11 KW
EFFICIENCY	>80 %
CONSUME	2-3.5 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	135 KG
FLUE GAS TEMPERATURE	222 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 180 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 100 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	980 MM
DEPTH	487 MM
WIDTH	668 MM

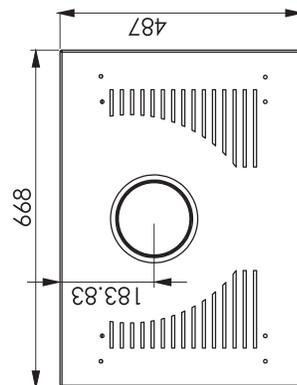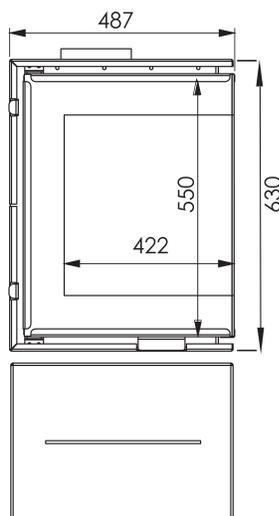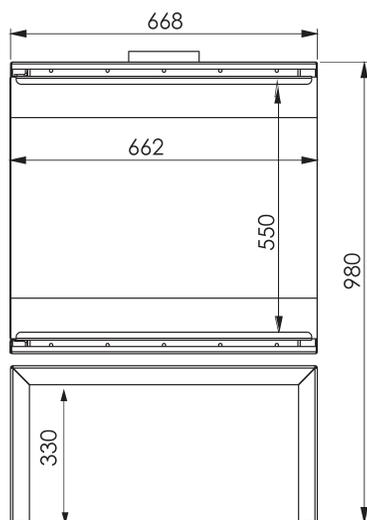

FREESTANDING SERIES

MODEL SCANDINAVIAN 75






TECHNICAL SPECIFICATION

MODEL	SCANDINAVIAN 75
POWER	8 - 12 KW
EFFICENCY	>80 %
CONSUME	2-3.5 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	146 KG
FLUE GAS TEMPERATURE	222 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Φ 180 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Φ 100 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	980 MM
DEPTH	487 MM
WIDTH	768 MM

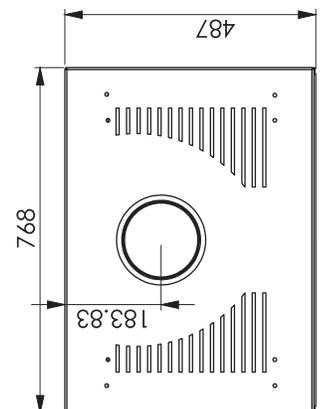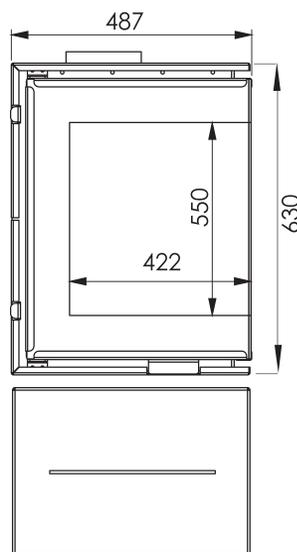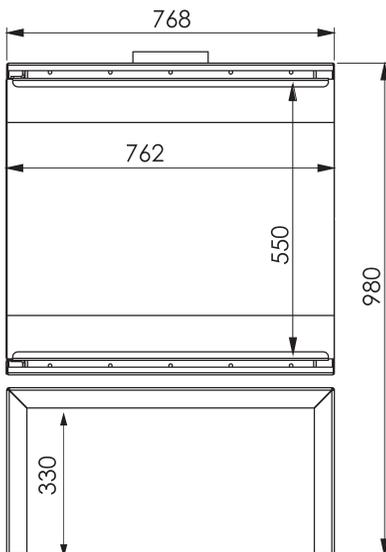

FREESTANDING SERIES

MODEL TUNNEL 90





TECHNICAL SPECIFICATION

MODEL	TUNNEL 90
POWER	4 - 8 KW
EFFICIENCY	>80 %
CONSUME	2 - 3,5 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	150 KG
FLUE GAS TEMPERATURE	242 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 150 MM
CO	<1 250 MG/M ³
FRESH AIR INLET	Ø 100 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	884 MM
DEPTH	416 MM
WIDTH	935 MM

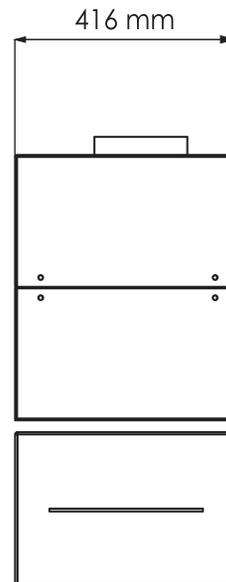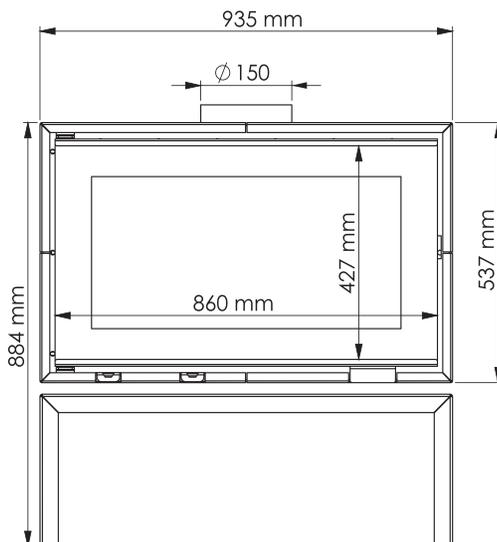

FREESTANDING SERIES

MODEL PANORAMA 75





TECHNICAL SPECIFICATION

MODEL	PANORAMA 75
POWER	5 - 9 KW
EFFICIENCY	>80 %
CONSUME	2 - 3.5 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	129 KG
FLUE GAS TEMPERATURE	222 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 150 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 100 MM
PRIMARY / SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	884 MM
DEPTH	390 MM
WIDTH	735 MM

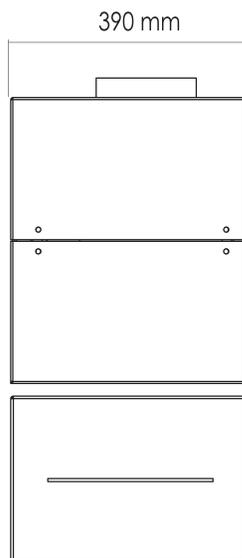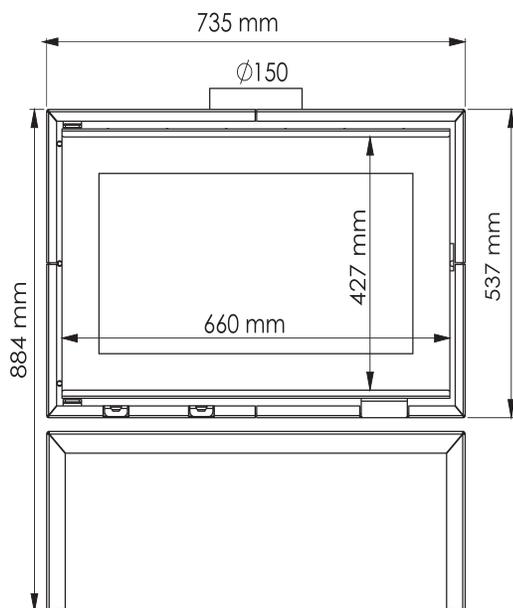

FREESTANDING SERIES

MODEL PANORAMA 90





TECHNICAL SPECIFICATION

MODEL	PANORAMA 90
POWER	5 - 9 KW
EFFICIENCY	>80 %
CONSUME	2 - 3.5 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	148 KG
FLUE GAS TEMPERATURE	186 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 150 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 100 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	884 MM
DEPTH	390 MM
WIDTH	935 MM

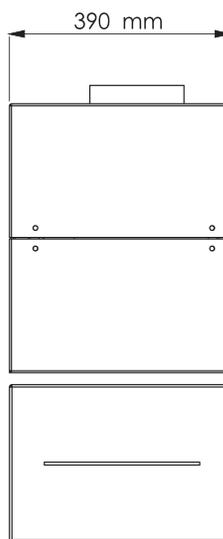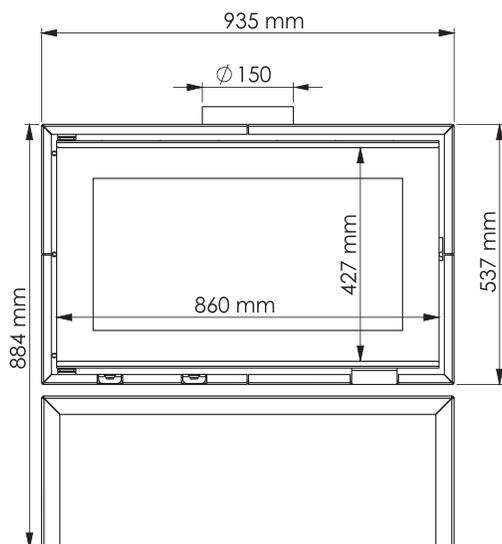

FREESTANDING SERIES

MODEL AMSTERDAM RS 67

TECHNICAL SPECIFICATION




MODEL	AMSTERDAM RS 67
POWER	7 - 12 KW
EFFICIENCY	>80%
CONSUME	2 - 3.5 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	91 KG
FLUE GAS TEMPERATURE	230 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 150 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 100 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	810 MM
DEPTH	445 MM
WIDTH	649 MM

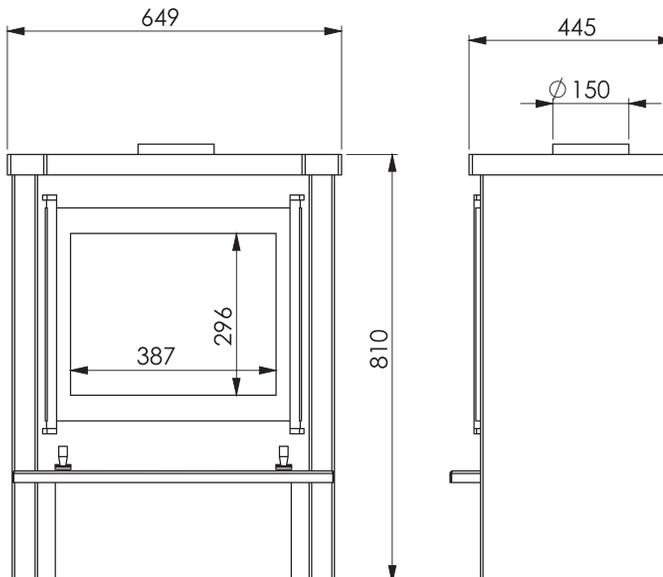

FREESTANDING SERIES

MODEL PANORAMA RS 21




TECHNICAL SPECIFICATION

MODEL	PANORAMA RS 21
POWER	7 - 12 KW
EFFICIENCY	>80 %
CONSUME	2 - 3.5 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	79 KG
FLUE GAS TEMPERATURE	210 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Φ 150 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Φ 100 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	834 MM
DEPTH	443 MM
WIDTH	560 MM

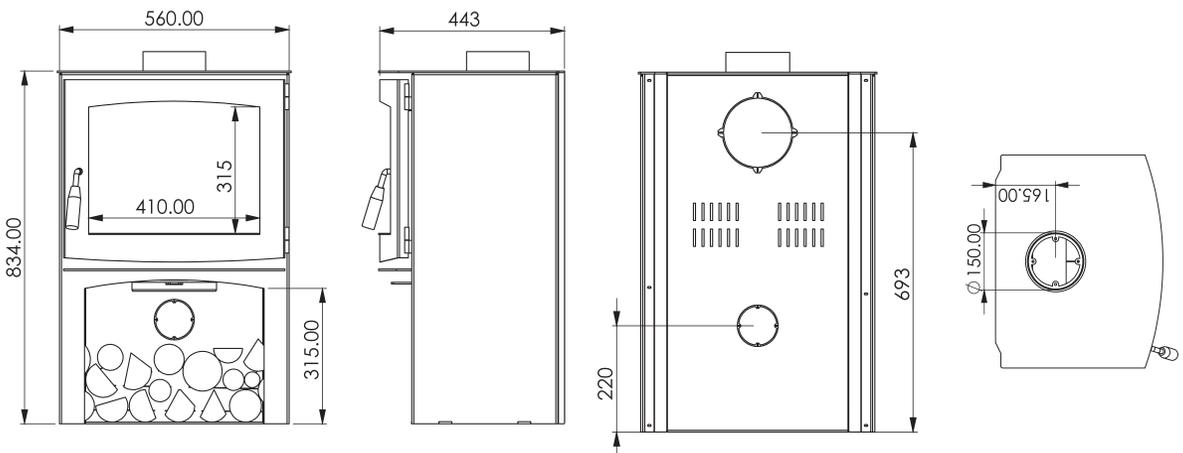

MODEL VIKING 50




TECHNICAL SPECIFICATION

MODEL	VIKING 50
POWER	7 - 12 KW
EFFICIENCY	>80 %
CONSUME	2 - 3.5 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	116 KG
FLUE GAS TEMPERATURE	210 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 150 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 100 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	836 MM
DEPTH	434 MM
WIDTH	512 MM

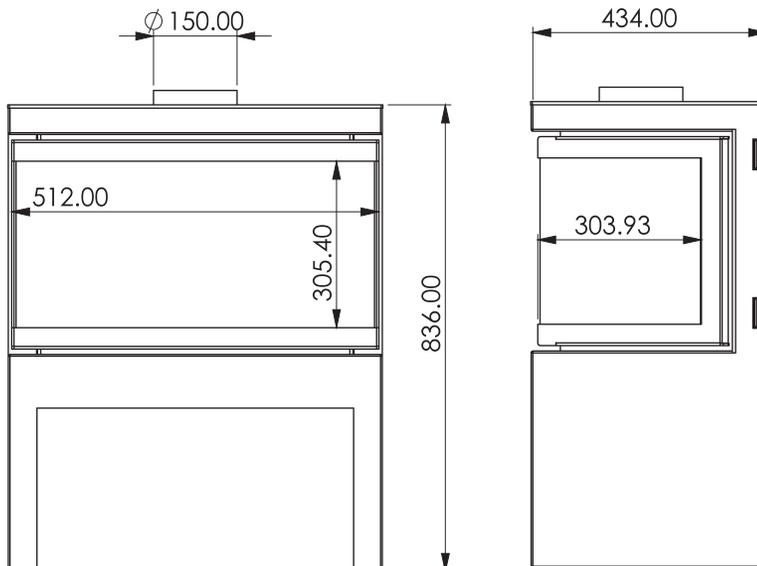

FREESTANDING SERIES

MODEL VIKING 67

TECHNICAL SPECIFICATION




MODEL	VIKING 67
POWER	7 - 12 KW
EFFICIENCY	>80 %
CONSUME	2 - 3.5 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	130 KG
FLUE GAS TEMPERATURE	210 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 150 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 100 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	836 MM
DEPTH	434 MM
WIDTH	662 MM

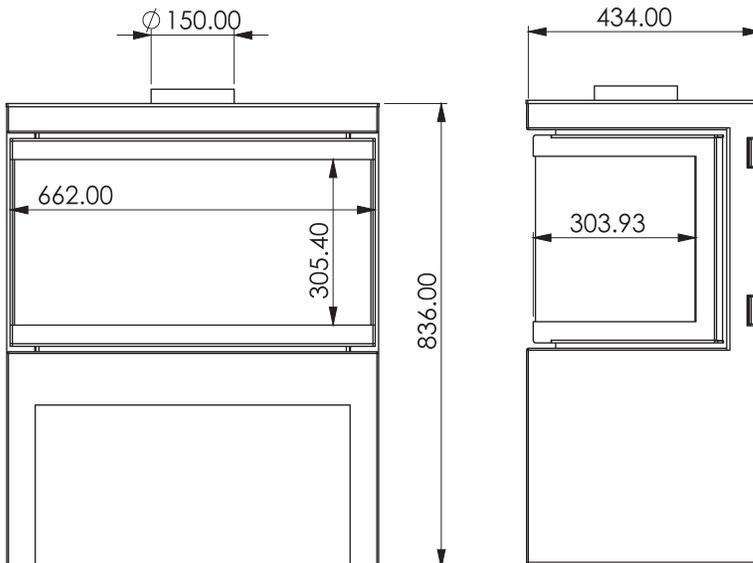

TECHNICAL SPECIFICATION




MODEL	VIKING 77
POWER	7 - 12 KW
EFFICIENCY	>80 %
CONSUME	2 - 3.5 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	146 KG
FLUE GAS TEMPERATURE	210 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 150 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 100 MM
PRIMARY/SECONDARY AIR	
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	836 MM
DEPTH	434 MM
WIDTH	762 MM

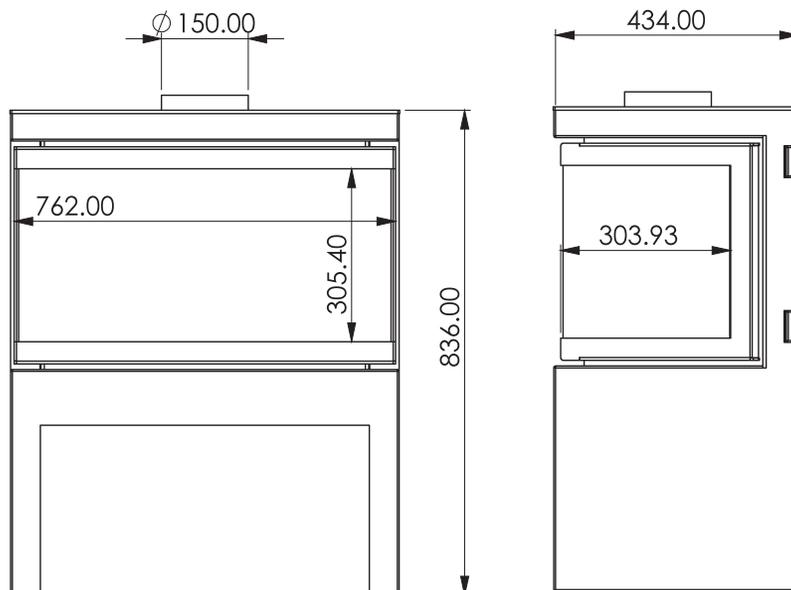

FREESTANDING SERIES

MODEL OUTDOOR 4D




TECHNICAL SPECIFICATION

MODEL	OUTDOOR 4D
CONSUME	2 - 3.5 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	78 KG
PIPE DIAMETER	Ø 150 MM
WARRANTY	2 YEARS



OVERALL DIMENSION

HEIGHT	961 MM
DEPTH	600 MM
WIDTH	553.37 MM

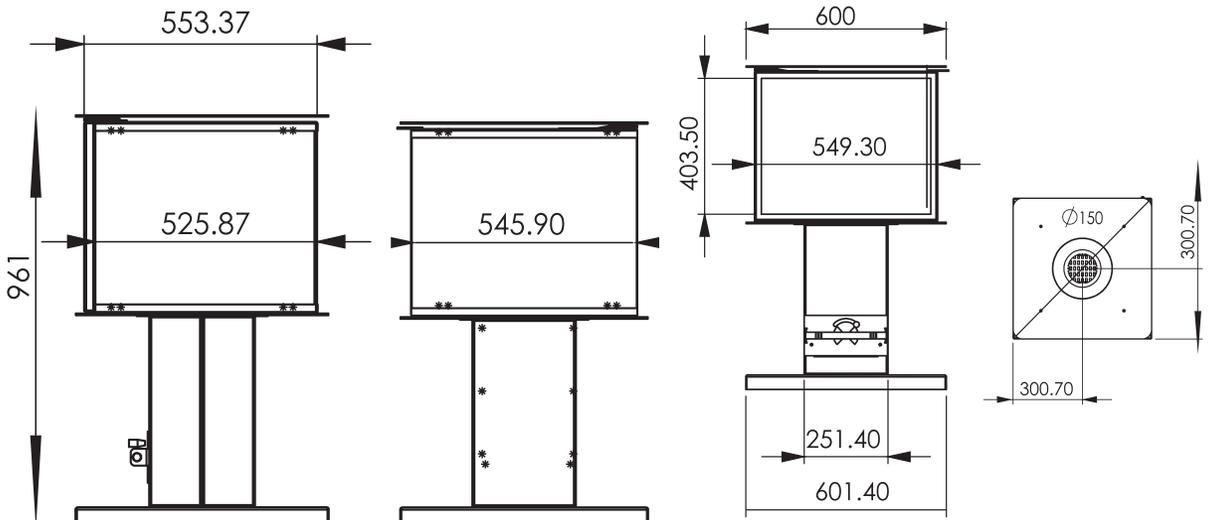



A.camineti

Open Side Series






TECHNICAL SPECIFICATION

MODEL	FLAT 50 OPEN SIDE
POWER	6 - 10 KW
EFFICIENCY	>75 %
CONSUME	1.5 - 2.5 KG/H
WOOD LENGTH	MAX.25 CM
WEIGHT	91 KG
FLUE GAS TEMPERATURE	210 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 180 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	854 MM
DEPTH	512 MM
WIDTH	683 MM

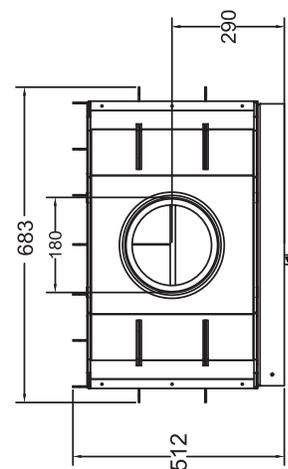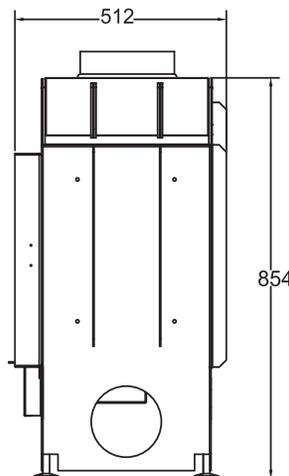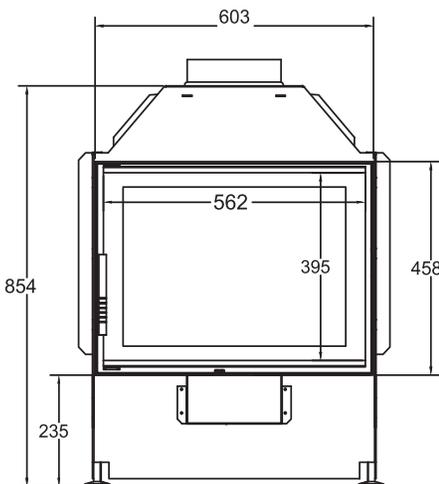

OPEN SIDE SERIES

FLAT 60 OPEN SIDE






TECHNICAL SPECIFICATION

MODEL	FLAT 60 OPEN SIDE
POWER	7 - 12 KW
EFFICIENCY	>75%
CONSUME	1.2 - 2.5 KG/H
WOOD LENGTH	MAX.25 CM
WEIGHT	101 KG
FLUE GAS TEMPERATURE	215 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 180 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	854 MM
DEPTH	512 MM
WIDTH	783 MM

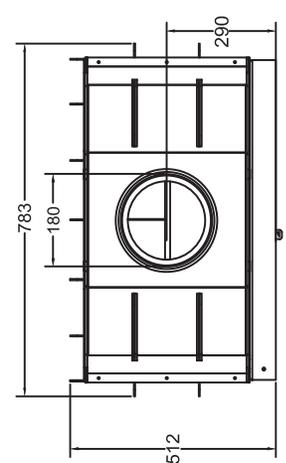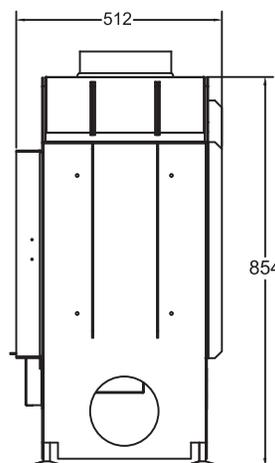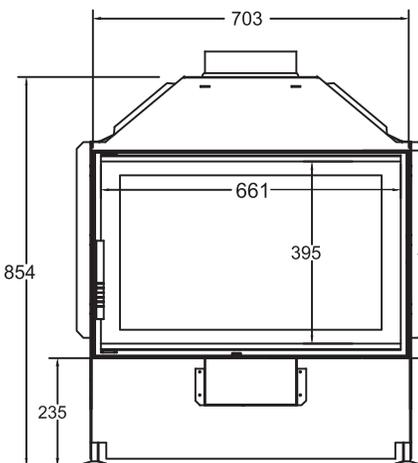

TECHNICAL SPECIFICATION






MODEL	FLAT 70 OPEN SIDE
POWER	7 - 12 KW
EFFICIENCY	>75 %
CONSUME	2 - 3.5 KG/H
WOOD LENGTH	MAX.25 CM
WEIGHT	111 KG
FLUE GAS TEMPERATURE	260 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 180 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	855 MM
DEPTH	510 MM
WIDTH	883 MM

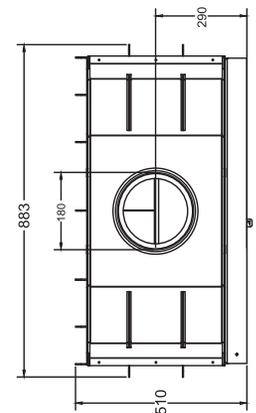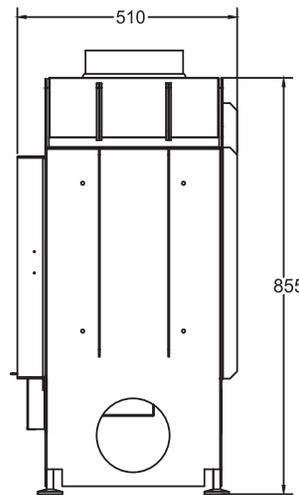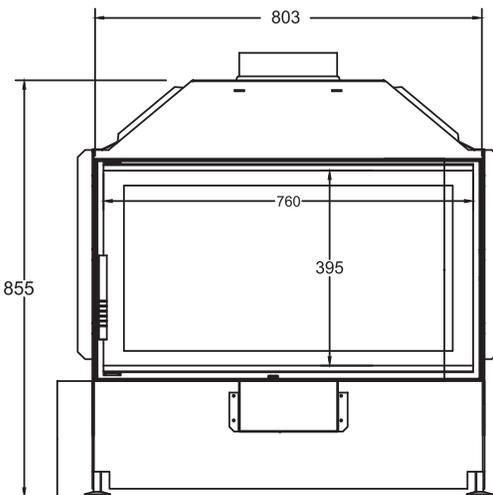

OPEN SIDE SERIES

FLAT 80 OPEN SIDE






TECHNICAL SPECIFICATION

MODEL	FLAT 80 OPEN SIDE
POWER	7 - 12 KW
EFFICIENCY	>75 %
CONSUME	2 - 3,5 KG/H
WOOD LENGTH	MAX.25 CM
WEIGHT	129 KG
FLUE GAS TEMPERATURE	276 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Φ 180 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Φ 150 MM
PRIMARY / SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	1018 MM
DEPTH	500 MM
WIDTH	896 MM

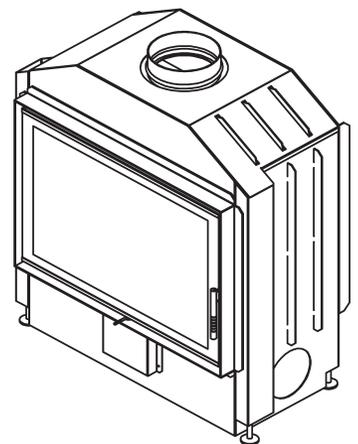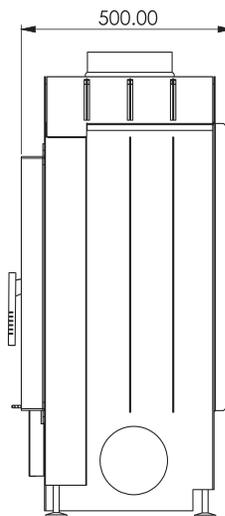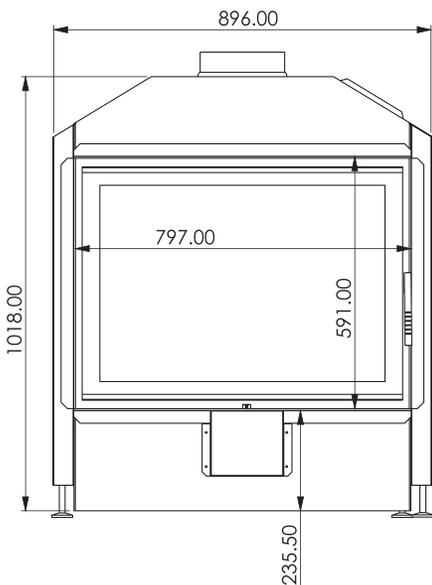

OPEN SIDE SERIES

QUATTRO 50 L/R OPEN SIDE






TECHNICAL SPECIFICATION

MODEL	QUATTRO 50 L/R OPEN SIDE
POWER	6 - 10 KW
EFFICIENCY	>75 %
CONSUME	2 - 3 KG/H
WOOD LENGTH	MAX.25 CM
WEIGHT	109 KG
FLUE GAS TEMPERATURE	263 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 180 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	863 MM
DEPTH	489 MM
WIDTH	630 MM

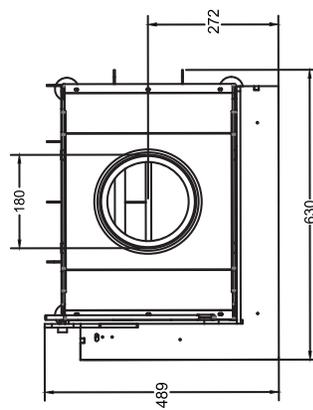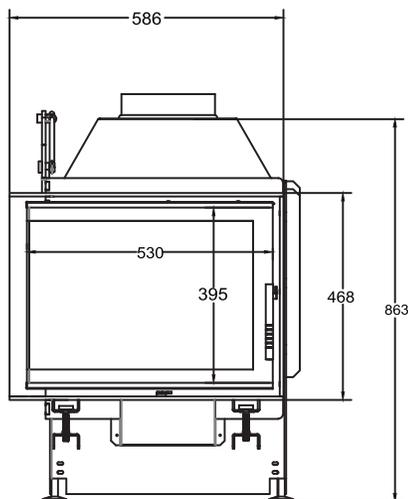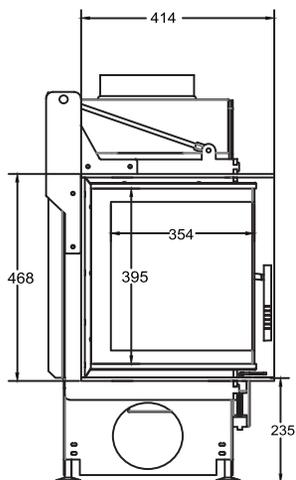

OPEN SIDE SERIES

QUATTRO 60 L/R OPEN SIDE






TECHNICAL SPECIFICATION

MODEL	QUATTRO 60 L/R OPEN SIDE
POWER	7 - 12 KW
EFFICIENCY	>75 %
CONSUME	2 - 3.5 KG/H
WOOD LENGTH	MAX.25 CM
WEIGHT	119 KG
FLUE GAS TEMPERATURE	263 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 180 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	863 MM
DEPTH	493 MM
WIDTH	731 MM

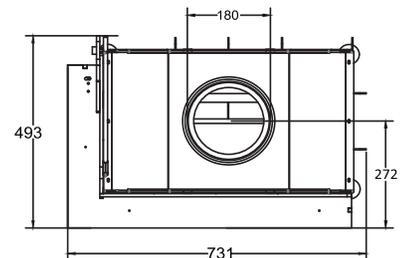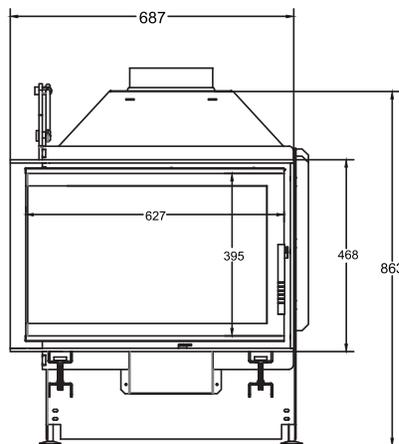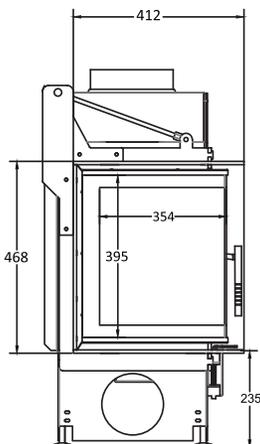

OPEN SIDE SERIES

QUATTRO 70 L/R OPEN SIDE






TECHNICAL SPECIFICATION

MODEL	QUATTRO 70 L/R OPEN SIDE
POWER	7 - 12 KW
EFFICIENCY	>75 %
CONSUME	2 - 3.5 KG/H
WOOD LENGTH	MAX.25 CM
WEIGHT	129 KG
FLUE GAS TEMPERATURE	266 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 180 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	863 MM
DEPTH	490 MM
WIDTH	831 MM

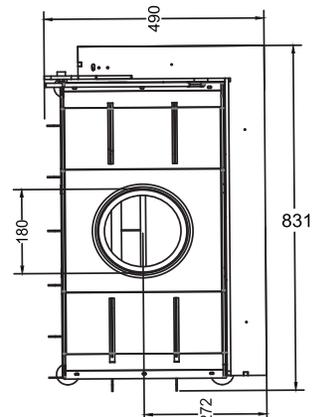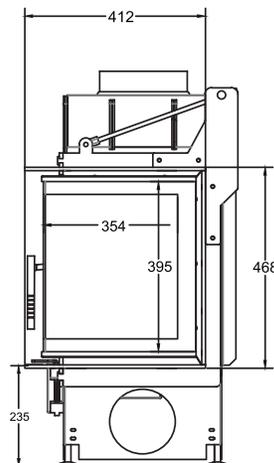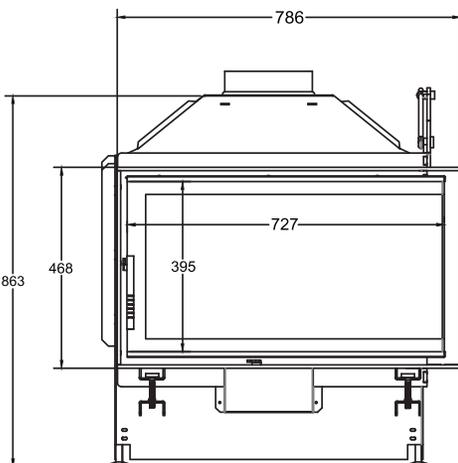

OPEN SIDE SERIES

QUATTRO 80 L/R OPEN SIDE




TECHNICAL SPECIFICATION

MODEL	QUATTRO 80 L/R OPEN SIDE
POWER	7 - 12 KW
EFFICIENCY	>75 %
CONSUME	2 - 3.5 KG/H
WOOD LENGTH	MAX.25 CM
WEIGHT	140 KG
FLUE GAS TEMPERATURE	266 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 180 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	863 MM
DEPTH	488.6 MM
WIDTH	923 MM

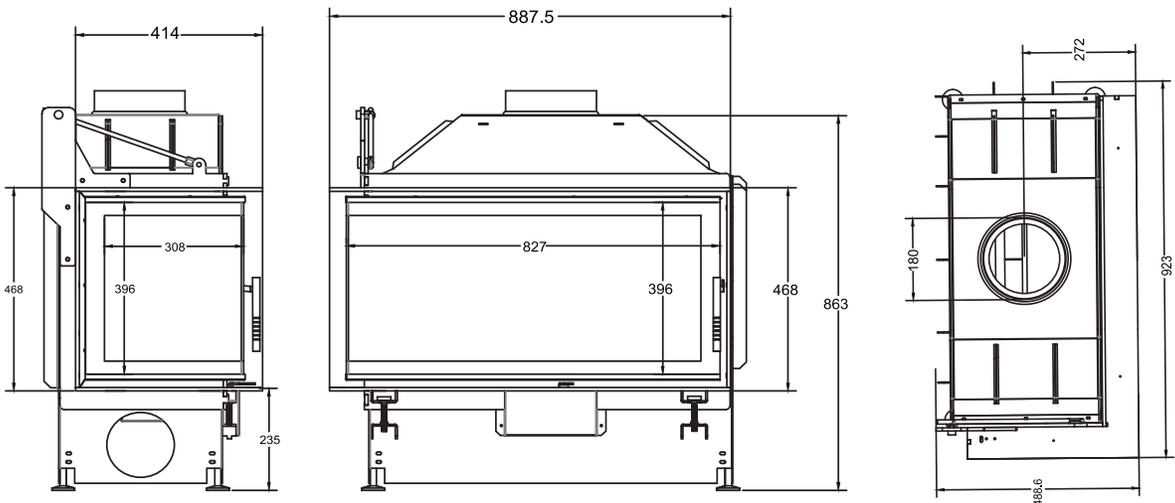

OPEN SIDE SERIES

CRYSTAL 50 OPEN SIDE






TECHNICAL SPECIFICATION

MODEL	CRYSTAL 50 OPEN SIDE
POWER	6 - 10 KW
EFFICIENCY	>75 %
CONSUME	2 - 3 KG/H
WOOD LENGTH	MAX.25 CM
WEIGHT	100 KG
FLUE GAS TEMPERATURE	210 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 180 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY / SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	940 MM
DEPTH	480 MM
WIDTH	608 MM

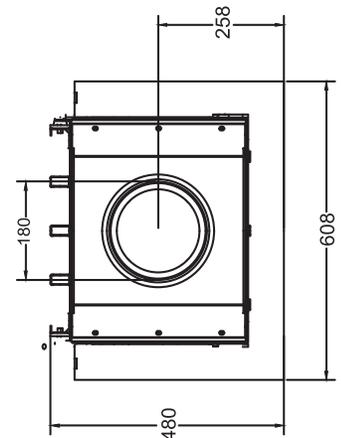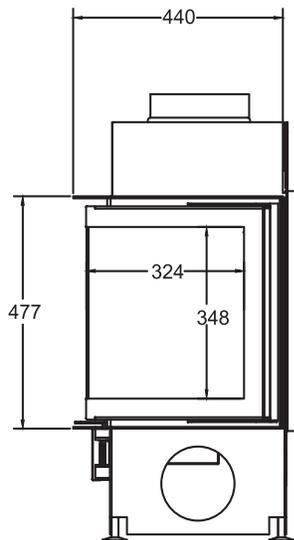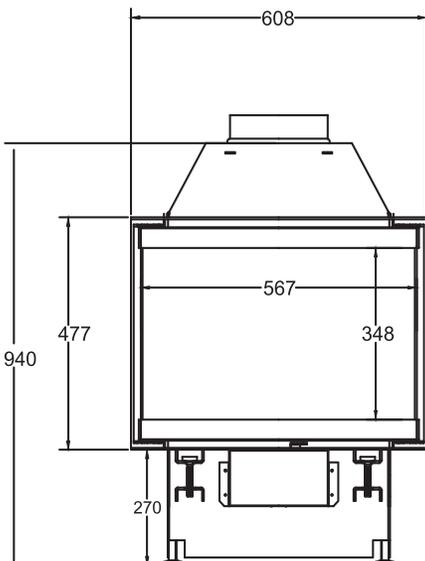

OPEN SIDE SERIES

CRYSTAL 60 OPEN SIDE




TECHNICAL SPECIFICATION

MODEL	CRYSTAL 60 OPEN SIDE
POWER	6 - 10 KW
EFFICIENCY	>75 %
CONSUME	2 - 3 KG/H
WOOD LENGTH	MAX.25 CM
WEIGHT	105 KG
FLUE GAS TEMPERATURE	215 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 180 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	940 MM
DEPTH	480 MM
WIDTH	658 MM

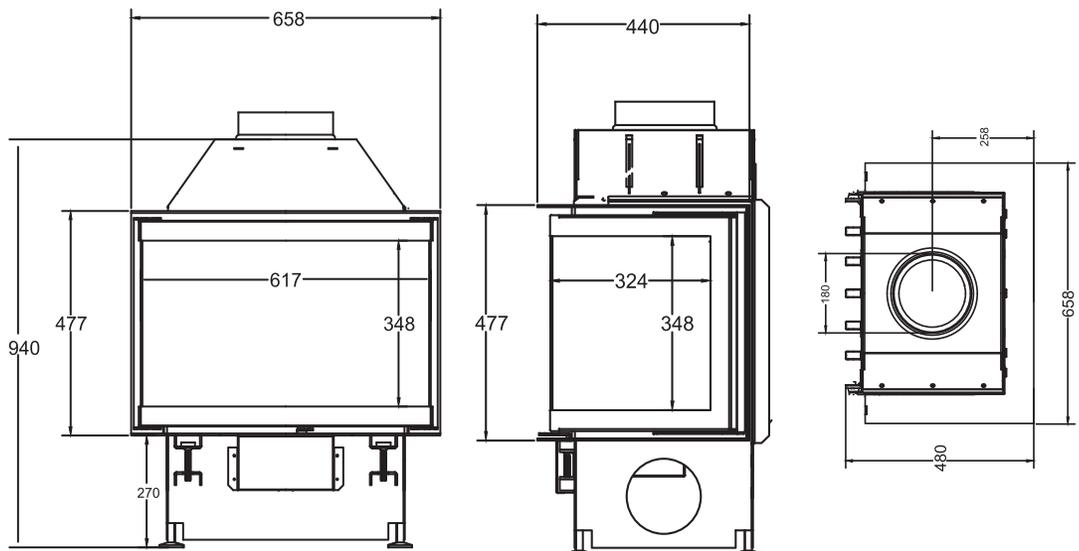

OPEN SIDE SERIES

CRYSTAL 70 OPEN SIDE




TECHNICAL SPECIFICATION

MODEL	CRYSTAL 70 OPEN SIDE
POWER	7 - 12 KW
EFFICIENCY	>75 %
CONSUME	2 - 3.5 KG/H
WOOD LENGTH	MAX.25 CM
WEIGHT	113 KG
FLUE GAS TEMPERATURE	260 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 180 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	940 MM
DEPTH	480 MM
WIDTH	758 MM

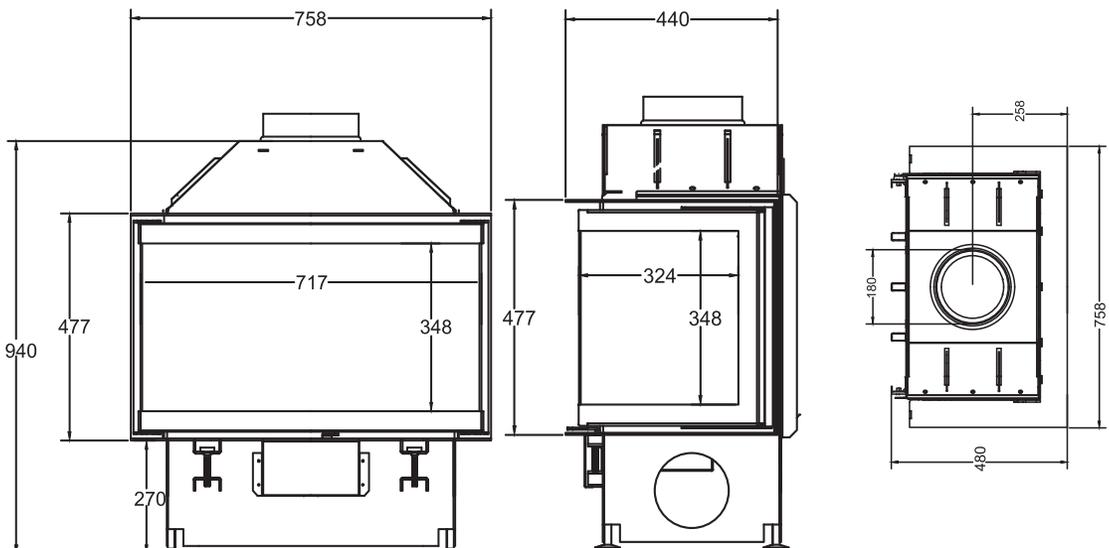

OPEN SIDE SERIES

CRYSTAL 80 OPEN SIDE






TECHNICAL SPECIFICATION

MODEL	CRYSTAL 80 OPEN SIDE
POWER	7 - 12 KW
EFFICIENCY	>75 %
CONSUME	2 - 3.5 KG/H
WOOD LENGTH	MAX.25 CM
WEIGHT	123 KG
FLUE GAS TEMPERATURE	276 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 180 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS

OVERALL DIMENSION

HEIGHT	940 MM
DEPTH	480 MM
WIDTH	858 MM

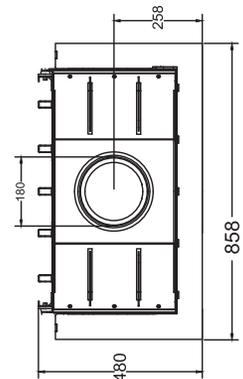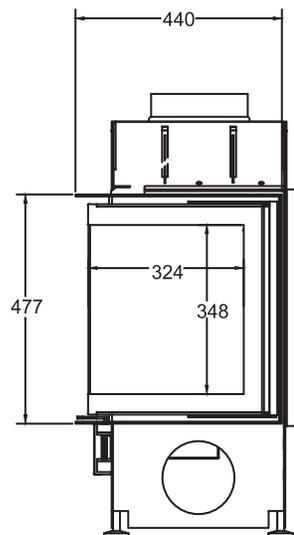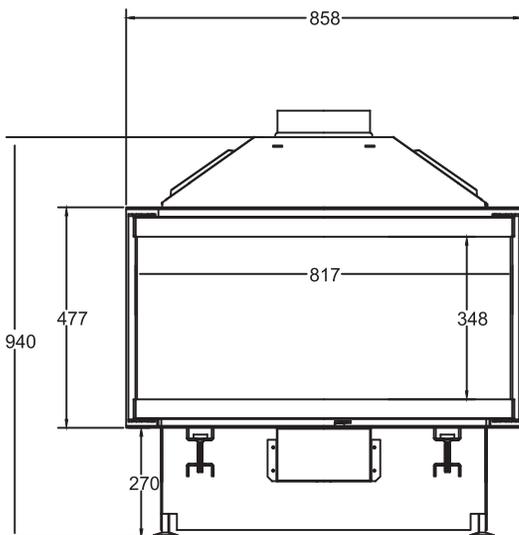


A.caminetti

Cassette Nordic Series



OPEN SIDE SERIES

CASSETTE NORDIC 60

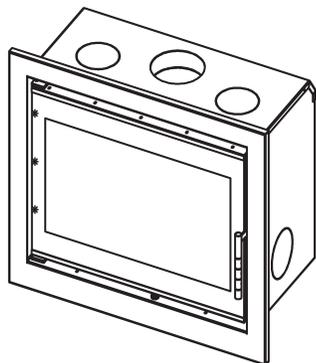




TECHNICAL SPECIFICATION

MODEL	CASSETTE NORDIC 60
POWER	5 - 9 KW
EFFICIENCY	>80 %
CONSUME	2 - 3 KG/H
WOOD LENGTH	MAX.25 CM
WEIGHT	98 KG
FLUE GAS TEMPERATURE	225 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 150 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS




OVERALL DIMENSION

HEIGHT	622 MM
DEPTH	400 MM
WIDTH	697 MM

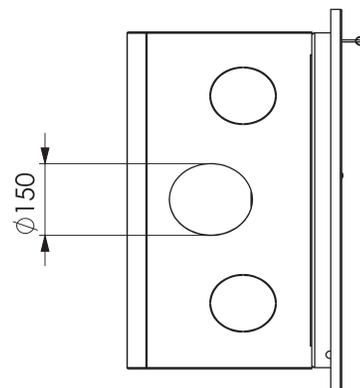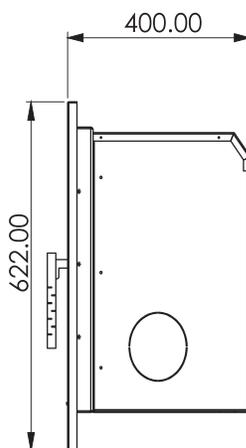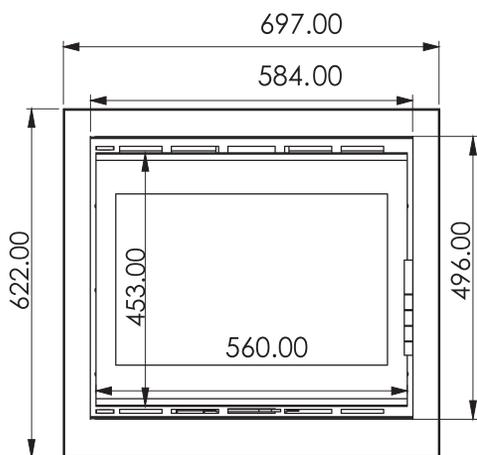

OPEN SIDE SERIES

CASSETTE NORDIC 70

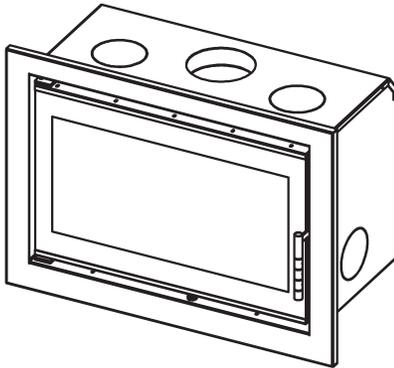




TECHNICAL SPECIFICATION

MODEL	CASSETTE NORDIC 70
POWER	5 - 9 KW
EFFICIENCY	>80 %
CONSUME	2 - 3 KG/H
WOOD LENGTH	MAX.25 CM
WEIGHT	120 KG
FLUE GAS TEMPERATURE	222 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 150 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY / SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS



OVERALL DIMENSION

HEIGHT	622 MM
DEPTH	400 MM
WIDTH	797 MM

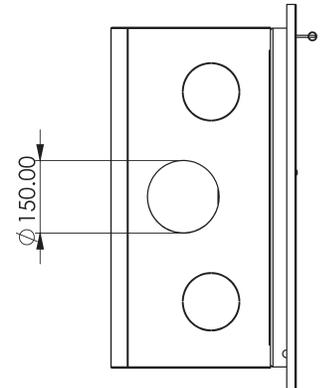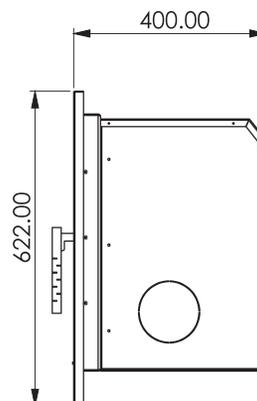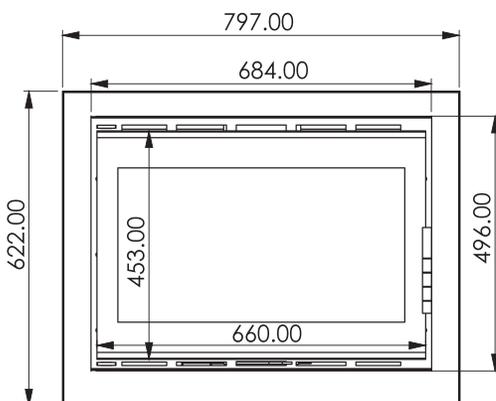


OPEN SIDE SERIES

CASSETTE NORDIC 90



TECHNICAL SPECIFICATION

MODEL	CASSETTE NORDIC 90
POWER	5- 10 KW
EFFICENCY	>80 %
CONSUME	2- 3.5 KG/H
WOOD LENGTH	MAX.25 CM
WEIGHT	134 KG
FLUE GAS TEMPERATURE	196 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 150 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS

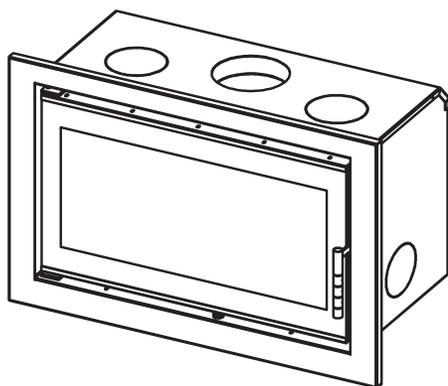


OVERALL DIMENSION

HEIGHT	622 MM
DEPTH	400 MM
WIDTH	997 MM

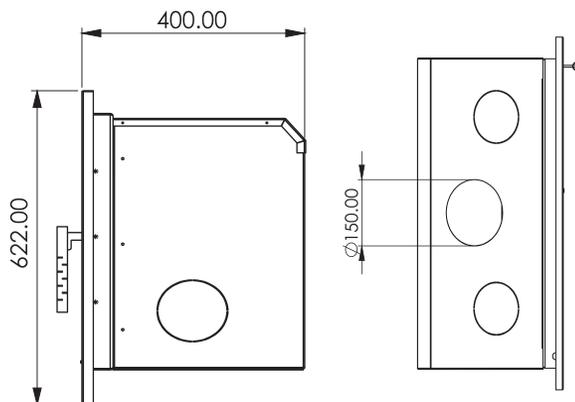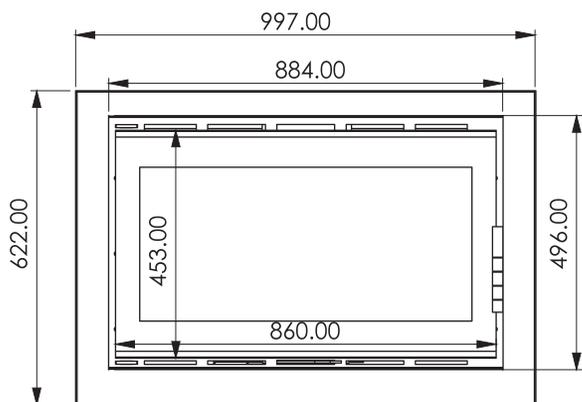




TECHNICAL SPECIFICATION

MODEL	CASSETTE NORDIC W70
POWER	5 - 9 KW
EFFICIENCY	>80 %
CONSUME	2 - 3 KG/H
WOOD LENGTH	MAX.30 CM
WEIGHT	120 KG
FLUE GAS TEMPERATURE	220 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Ø 150 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Ø 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS

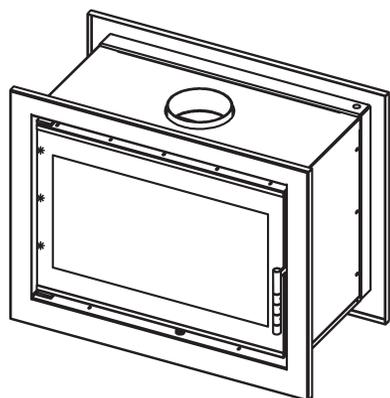

OVERALL DIMENSION

HEIGHT	622 MM
DEPTH	414 MM
WIDTH	798 MM

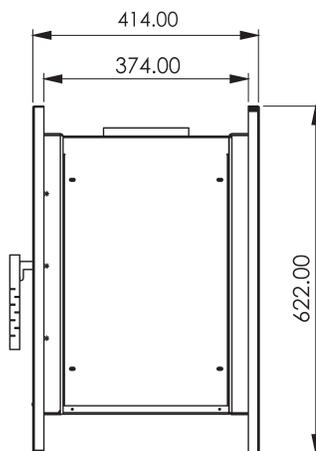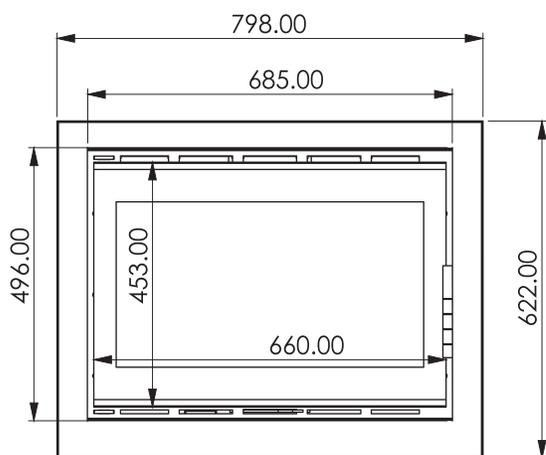


OPEN SIDE SERIES

CASSETTE NORDIC W90


TECHNICAL SPECIFICATION

MODEL	CASSETTE NORDIC W 90
POWER	5 - 10 KW
EFFICIENCY	>80%
CONSUME	2 - 3.5 KG/H
WOOD LENGTH	MAX.25 CM
WEIGHT	146 KG
FLUE GAS TEMPERATURE	242 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	Φ 150 MM
CO	<1250 MG/M ³
FRESH AIR INLET	Φ 150 MM
PRIMARY/SECONDARY AIR	
VENTILATION SYSTEM	ON ORDER
WARRANTY	5 YEARS

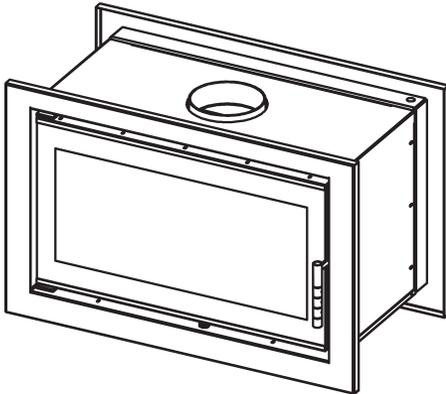


OVERALL DIMENSION

HEIGHT	622 MM
DEPTH	414 MM
WIDTH	998 MM

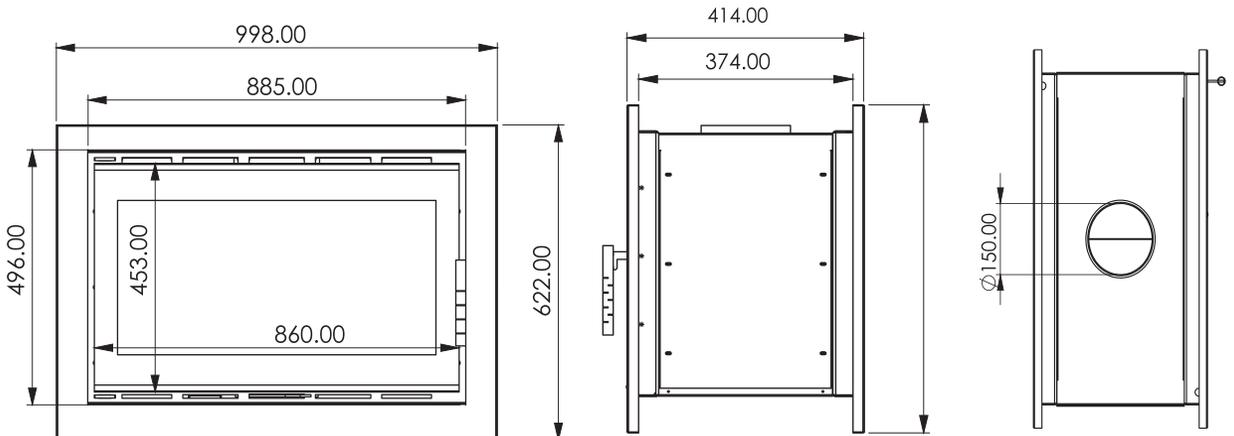

You always have a choice,
make the right one!

A.camineti

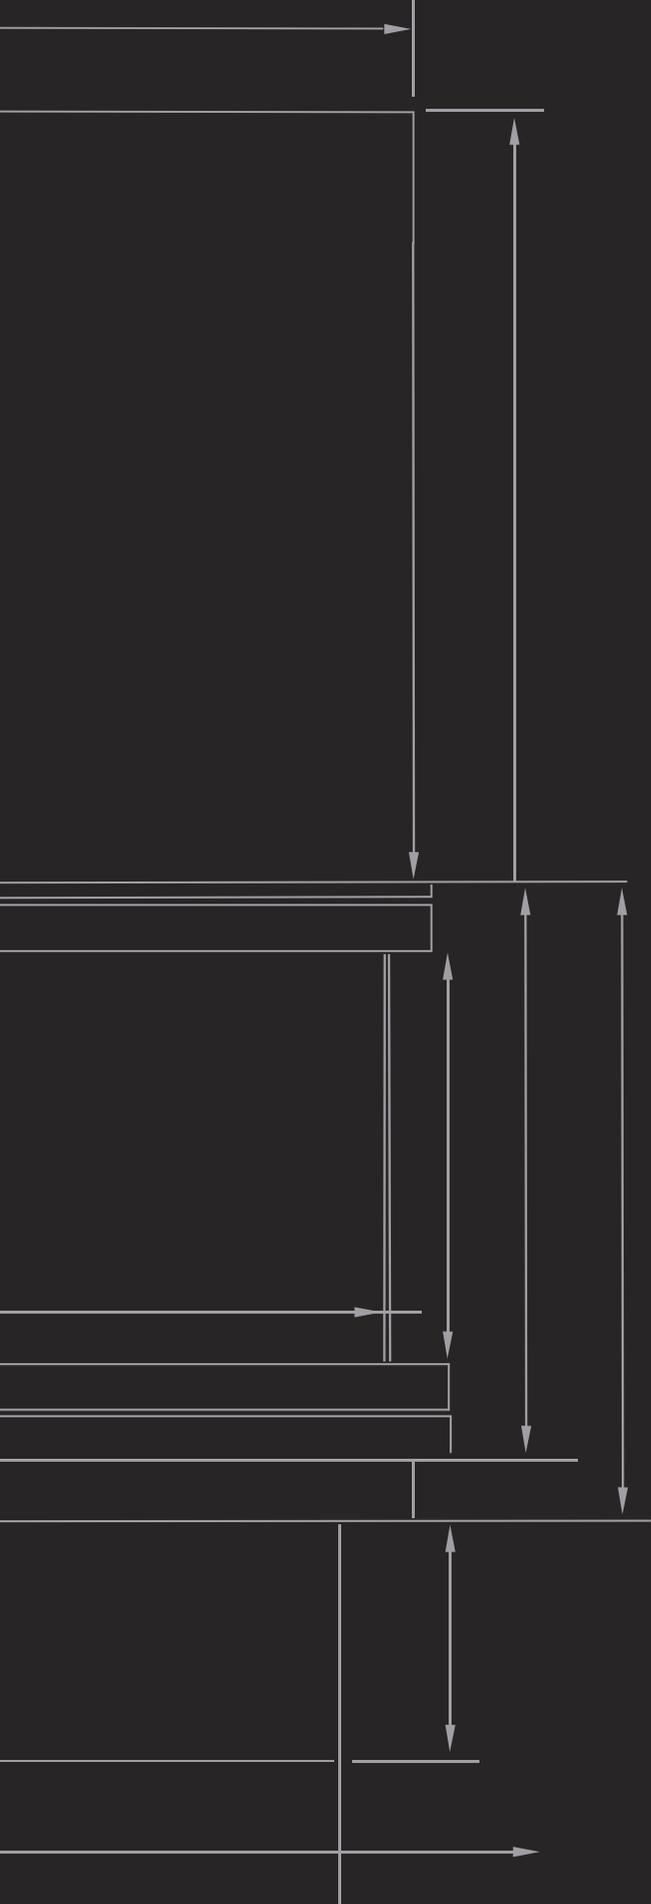

A.caminetti

✉ info@acaminetti-factory.com

✉ ergolding@acaminetti-factory.com

📍 Am Industriegleis 6a, 84030 Ergolding, Germany

📍 National Road, Km 2, Korçë-Ersekë, Albania

🌐 acaminetti-factory.com